

EN installation instruction

Please read and understand all of the directions, before starting luminaire installation. Keep this instruction for future use.

LT Montavimo instrukcija

Prieš pradėdami šviestuvų montavimą, perskaitykite ir supraskite visus nurodymus. Išsaugokite šią instrukciją ateities naudojimui.

LV Instalācijas intrukcija

Lūdzu, izlasiet un saprotiet visus norādījumus, pirms sākt gaismekļa uzstādīšanu. Saglabājiet šos norādījumus turpmākai lietošanai.

ET Paigaldusjuhised

Palun lugege ja mõista kõik juhised enne valgusti paigaldamist. Järgige neid juhiseid tulevaseks kasutamiseks.

DE Montageanleitung

Bitte lesen und verstehen Sie alle Anweisungen, bevor Sie mit der Installation der Leuchte beginnen. Bewahren Sie diese Anweisungen zur zukünftigen Verwendung auf.

RU Инструкция по установке












Прочитайте и поймите все направления, прежде чем приступить к установке светильника. Сохраните эти инструкции для будущего использования.

PL Instrukcja montażu






Proszę przeczytać i zrozumieć wszystkie wskazówki, przed rozpoczęciem instalacji oprawy oświetleniowej. Zachowaj te instrukcje do przyszłego użytku.




220-240V
50-60Hz

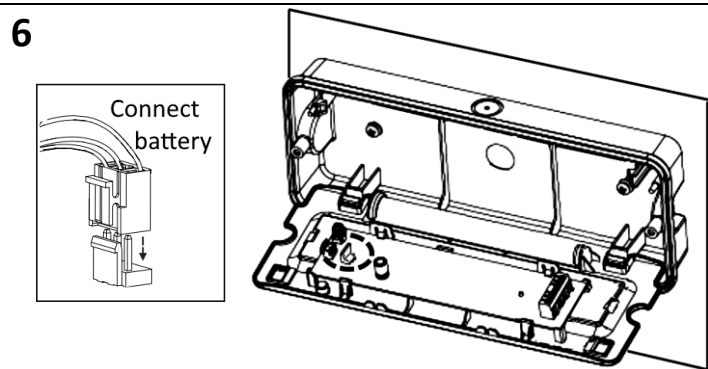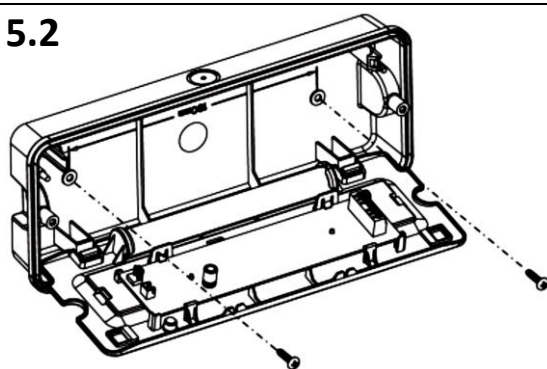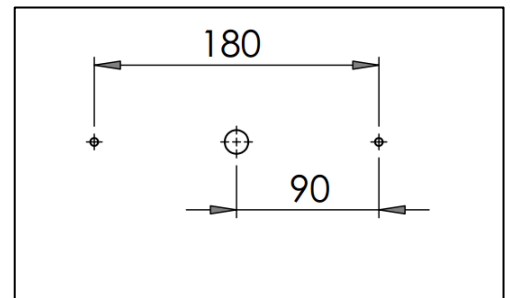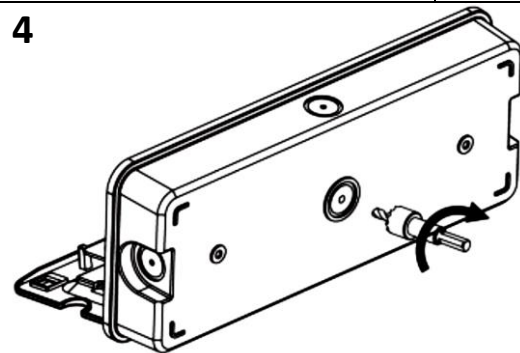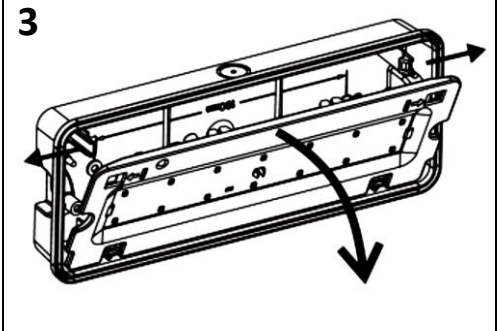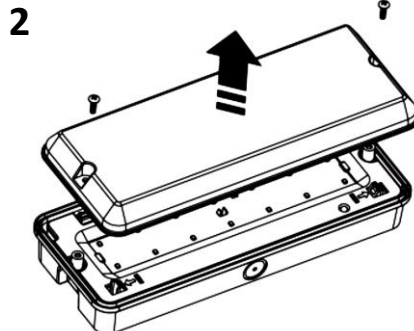

7

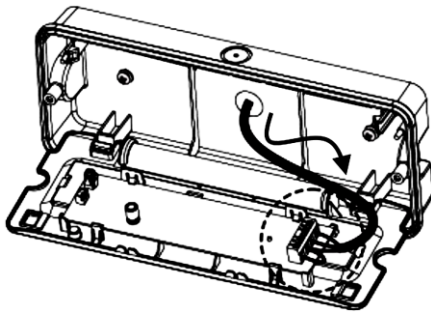


9

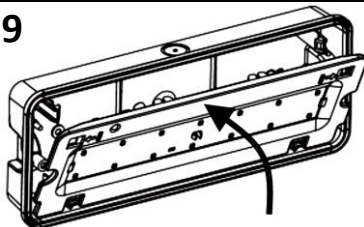


cable entry and mounting holes need to be sealed properly to achieve IP65 rating

10

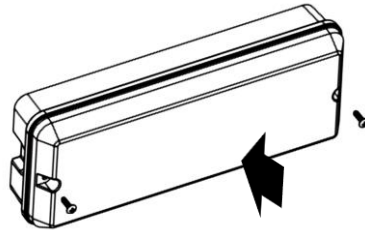

11

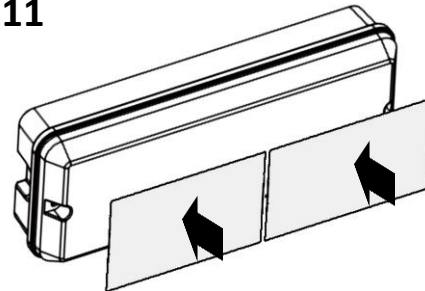

CHARACTERISTICS:

- Supply voltage: 220 - 240V_{AC}, 50 - 60Hz
- Charge time: up to 24 hours
- Network power supply and battery charge LED indicator
- 3.6 V 1.3Ah Ni-Cd batteries
- Insulation class II
- 1A 250V fuse
- Protection level: IP 65
- Ambient temperature: 0°C to +40°C
- Deep discharge protection (3 V)
- Overcharge protection (4.3 V)


TECHNICAL SPECIFICATIONS:

- Light source: SMD LED
- System power: 3.2 W
- Emergency operation time 3h
- Battery life max. 4 years
- Lumen output (mains/battery): 150/100 lm
- Weight: 485 g

Mounting:

- Wall

Description of LED indicator signals	
LED indicator status	situation
ON	normal operation/ battery charging
OFF	Emergency mode/ battery error

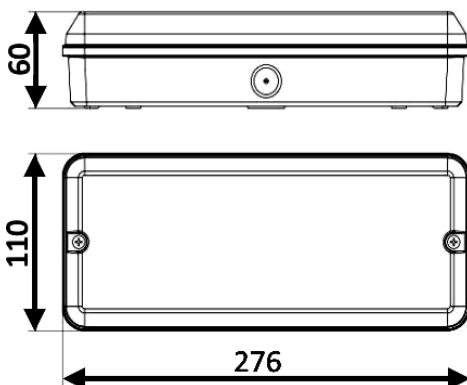

After installation luminaire should be left connected to mains power supply for a minimum of 24 hours to fully charge the battery. It is recommended to simulate mains failure (disconnect power supply) afterwards to ensure emergency mode is operating properly.

Exploitation:

