



EN installation instruction

Please read and understand all of the directions, before starting luminaire installation. Keep this instruction for future use.

LT Montavimo instrukcija

Prieš pradėdami šviestuvų montavimą, perskaitykite ir supraskite visus nurodymus. Išsaugokite šią instrukciją ateities naudojimui.

LV Instalācijas intrukcija

Lūdzu, izlasiet un saprotiet visus norādījumus, pirms sākt gaismekļa uzstādīšanu. Saglabāiet šos norādījumus turpmākai lietošanai.

ET Paigaldusjuhised

Palun lugege ja mõista kõik juhised enne valgusti paigaldamist. Järgige neid juhiseid tulevaseks kasutamiseks.

DE Montageanleitung



Bitte lesen und verstehen Sie alle Anweisungen, bevor Sie mit der Installation der Leuchte beginnen. Bewahren Sie diese Anweisungen zur zukünftigen Verwendung auf.

RU Инструкция по установке


Прочитайте и поймите все направления, прежде чем приступить к установке светильника. Сохраните эти инструкции для будущего использования.

PL Instrukcja montażu


Proszę przeczytać i zrozumieć wszystkie wskazówki, przed rozpoczęciem instalacji oprawy oświetleniowej. Zachowaj te instrukcje do przyszłego użytku.

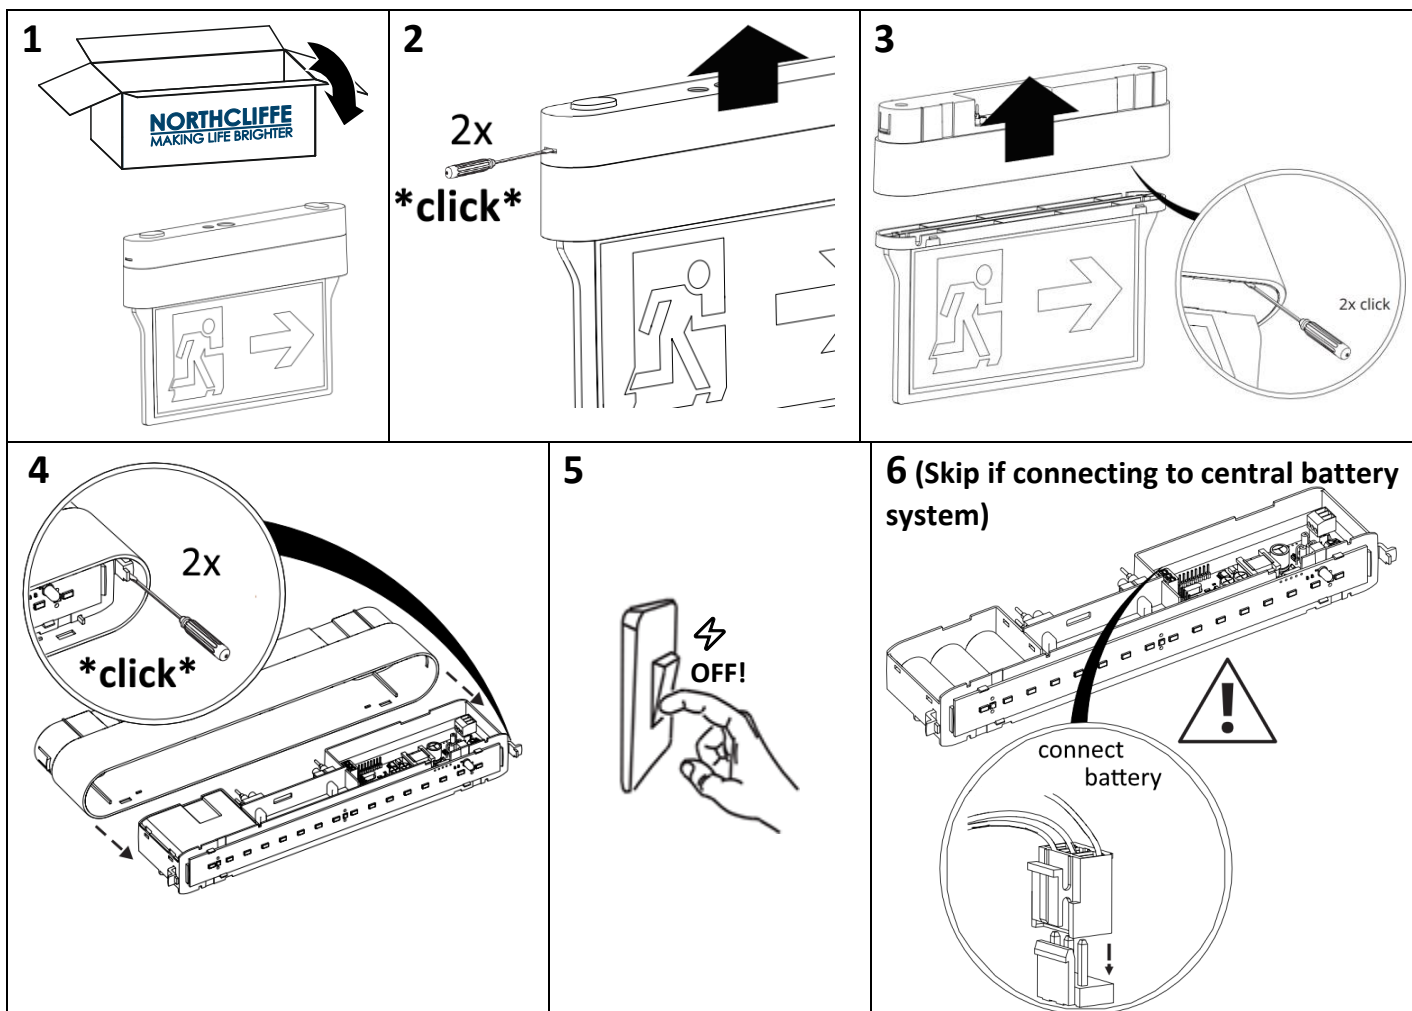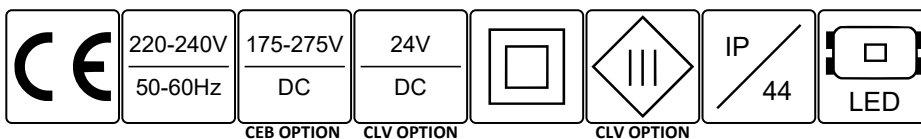


7

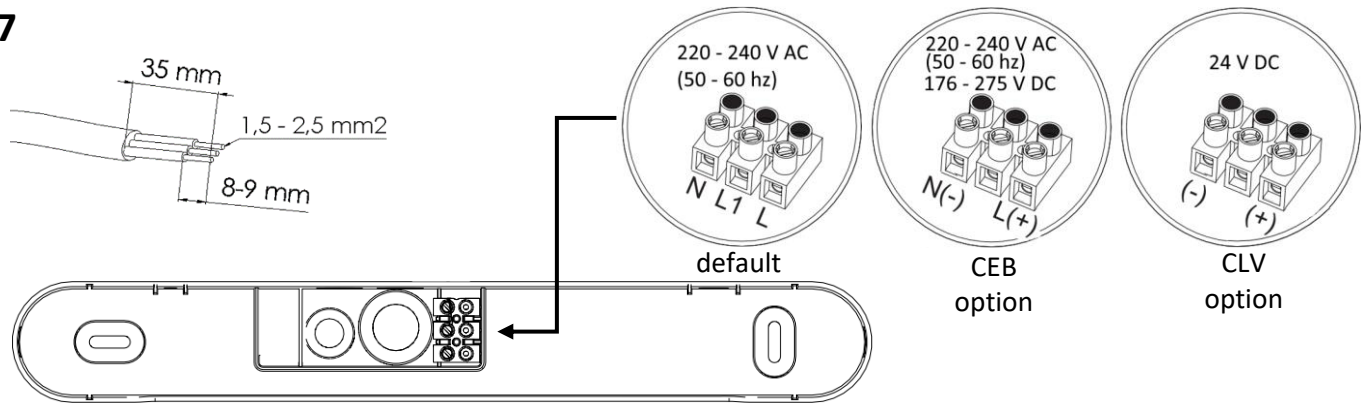


8

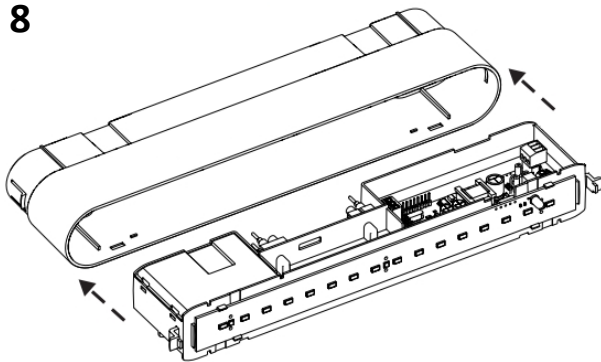


9

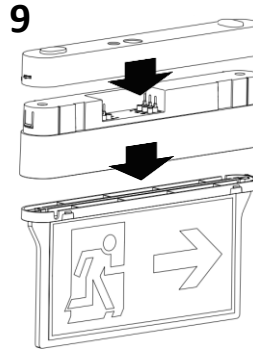


10A (Wall mounted)




10B (Surface mounted or suspended)

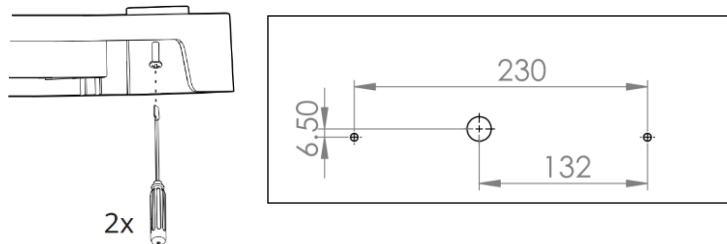

10C-1 (Recessed)

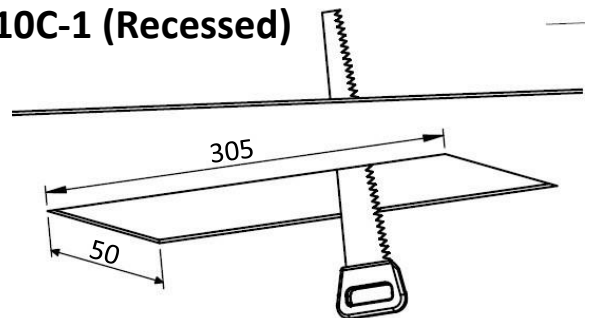

10C-2

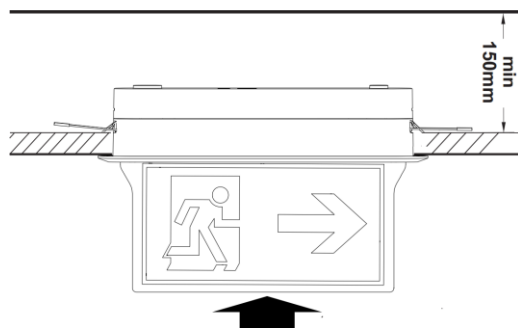

Attention!

- Make sure the battery is connected with correct polarity.
- Mains supply should only be connected after the battery is connected to the inverter.
- Make sure the cable's shield is properly isolated.
- In a fitting the cable L and L1 is required for the maintained mode, the non-maintained mode does not require L1 cable.

CHARACTERISTICS:

- Supply voltage: 220 - 240VAC/50 - 60Hz, 175 - 275VDC, 24VDC
- Charge time: up to 24 hours
- Network power supply and battery charge LED indicator
- Ni-Cd batteries
- Insulation class II (III with CLV option)
- Protection level: IP 44
- Ambient temperature: 0°C to +40°C
- Electronic protection against complete battery discharge
- Compatibility with standard specifications PN-EN 60598, PN-EN 1838

TECHNICAL SPECIFICATIONS:

- Light source: LED 1W
- Emergency operation time 1 or 3h
- Battery life max. 4 years

Materials:

- White PC body,


Mounting:

- Wall, Ceiling


Description of LED indicator signals:

LP.	Color of LED indicator shining					Light source	Description
1	G	R	G	R	G	any	Confirmation of the reset of timer or errors (AT)
2						shining	Emergency mode
3						not shining	Standby mode
4				R	R	any	Communication error (only RS)
5	R					any	Battery error
6	R					any	Light source or electronics error
7	Error indication or not shining					shining	Performing test or mains mode
8	Error indication or not shining					any	No battery
9	G					not shining	Battery loading
10	G					not shining	Standby mode (battery full)
11	R		R		G	not shining	Too much output power for this battery capacity

Nashi S

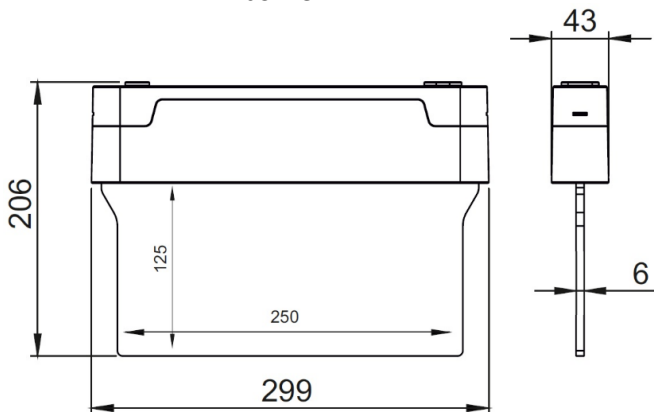

Nashi R

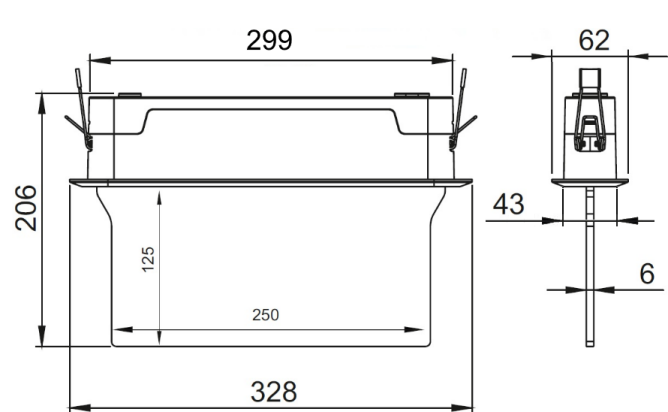

Exploitation:

