


## Data sheet | Item number: 2273-500

Mounting carrier; for single- and double-row con.; 2273 Series; for DIN-35 rail mounting/screw mounting; orange

<https://www.wago.com/2273-500>

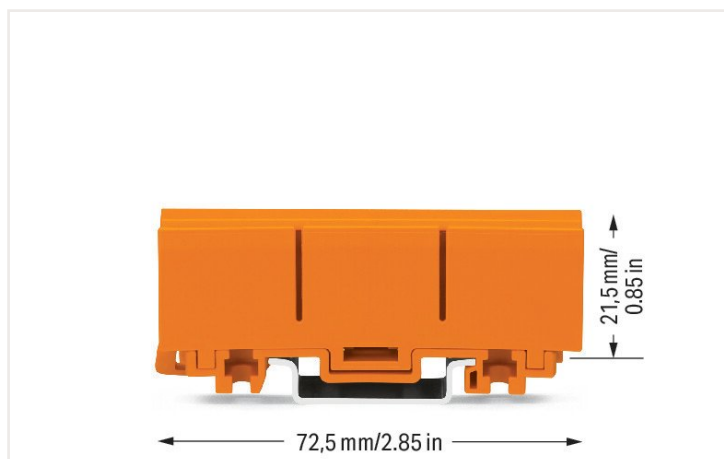

Color: ■ orange



### Notes

#### Note

One single carrier can hold up to 24 clamping units in a very narrow space. Previously, this was only possible using rail-mount terminal blocks.  
Additional benefits:

- Mount carrier onto DIN-35 rail or via screws – easily and quickly
- Accommodate three 2.5 mm<sup>2</sup> (12 AWG) 2273 Series Connectors in a single carrier
- Easily exchange connectors
- Large marking area for self-adhesive marking strips or for direct marking with permanent felt-tip pen

### Physical data

|                                   |                      |
|-----------------------------------|----------------------|
| Width                             | 18.5 mm / 0.728 inch |
| Height                            | 72.5 mm / 2.854 inch |
| Depth from upper-edge of DIN-rail | 21.5 mm / 0.846 inch |

### Mechanical data

|               |   |
|---------------|---|
| Mounting type | DIN-35 rail<br>Screw mount                          |
| Suitable      | for single- and double-row connectors (2273 Series) |

### Material data

|                      |  |
|----------------------|--|
| Note (material data) | <a href="#">Information on material data can be found here</a> |
| Color                | orange   |
| Fire load            | 0.322 MJ   |
| Weight               | 10.7 g   |



| Commercial data                     |                     |
|-------------------------------------|---------------------|
| Product Group                       | 7 (Push Wire Conn.) |
| eCl@ss 10.0                         | 27-14-11-92         |
| eCl@ss 9.0                          | 27-14-11-92         |
| ETIM 7.0                            | EC002848            |
| ETIM 6.0                            | EC002848            |
| PU (SPU)                            | 50 (10) Stück       |
| Packaging type                      | Box                 |
| Country of origin VKOrg Germany     | DE                  |
| GTIN                                | 4050821101871       |
| Customs tariff number VKOrg Germany | 39269097900         |

Approvals and certificates


Ship Approvals







| Approval   | Standard | Certificate name |
|--|----------|------------------|
| DNV GL<br>Det Norske Veritas, Germanischer Lloyd | EN 60998 | TAE000015T       |

Downloads

Environmental Product Compliance

| Compliance Search   |
|---|
| Environmental Product Compliance 2273-500  |

Documentation

| Additional Information |   | Bid Text                    |   |
|------------------------|---|-----------------------------|---|
| Technical Section      | pdf<br>2142.18 KB  | 2273-500                    | 19.02.2019<br>xml<br>2.58 KB   |
|                        |   | 2273-500                    | 17.05.2017<br>doc<br>23.50 KB  |
|                        |   | ausschreiben.de<br>2273-500 |                                |


| CAD/CAE-Data             |                               |
|--------------------------|-------------------------------|
| CAD data                 | CAE data                      |
| 2D/3D Models<br>2273-500 | EPLAN Data Portal<br>2273-500 |
|                          | WSCAD Universe<br>2273-500    |
|                          | ZUKEN Portal<br>2273-500      |

| 1 Compatible products    |
|--------------------------|
| 1.1 Optional accessories |
| 1.1.1 Marking            |
| 1.1.1.1 Marking strip    |




Item no.: 210-834  
Marking strips; on reel; 5 mm wide; plain;  
Self-adhesive; white

### Installation notes



The mounting carrier is suitable for both connector heights.

To adjust the mounting carrier, unlock the latch via operating tool (5.5 mm blade) and move the clamping slide to the required width by rotating the tool.



The mounting carrier is suitable for both connector widths and can be adjusted by unlocking the latch via operating tool (5.5 mm blade) and moving the clamping slide to the required width by rotating the tool.

The mounting carrier is suitable for both connector widths.