



Data sheet | Item number: 221-615

COMPACT Splicing Connector; for all conductor types; max. 6 mm²; 5-conductor;
with levers; transparent housing; Surrounding air temperature: max 85°C (T85); 6,00
mm²; transparent

<https://www.wago.com/221-615>

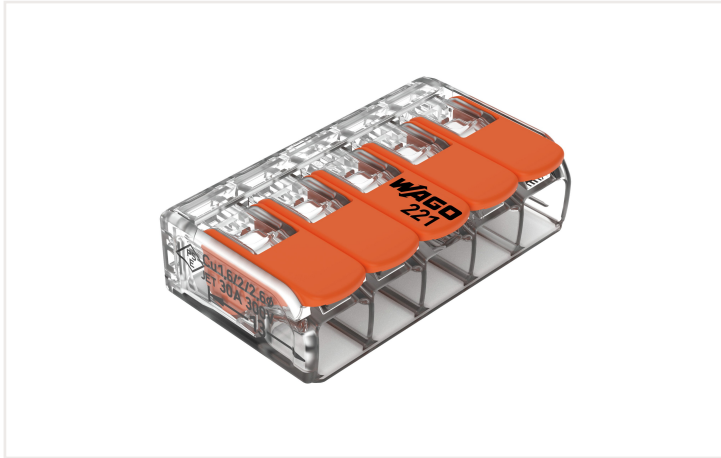

Color:  transparent

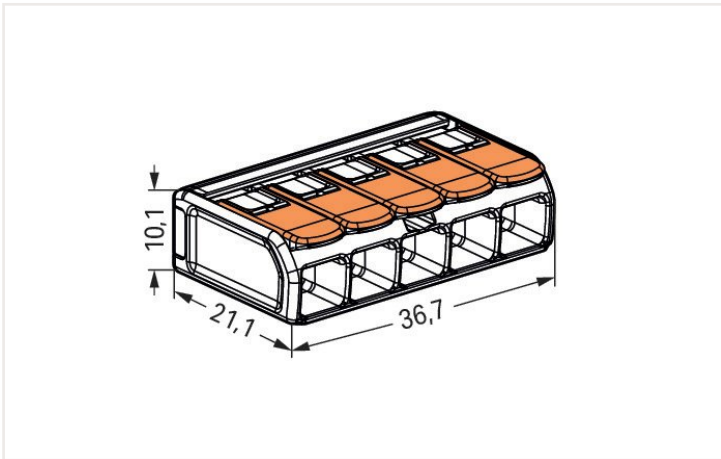

Dimensions in mm

Your benefits:

- Ease of use – pull the lever up, insert a conductor and push the lever back down
- Available as 2-, 3- and 5-wire connectors
- Easily terminate conductors from 0.5 to 6 mm²
- Connection of all conductor types
- Time savings for installers and device manufacturers
- Quickly install devices with higher power consumption
- Safely install long cable runs with larger conductor cross sections
- Mounting carrier for installation conforms to standards
- Custom carriers are possible

Notes

Safety information 1

in grounded power lines

Electrical data

Ratings per IEC/EN

Ratings per	EN 60664
Nominal voltage (II/2)	450 V
Rated surge voltage (II/2)	4 kV
Rated current	41 A
Legend (ratings)	(II / 2) ≙ Overvoltage category II / Pollution degree 2

Ratings per UL

Approvals per	UL 486C
Rated voltage UL (Use Group C)	600 V
Rated current UL (Use Group C)	30 A

Connection data

Total number of connection points	5
Total number of potentials	1

Connection 1

Connection technology	CAGE CLAMP®
Actuation type	Lever
Connectable conductor materials	Copper
Nominal cross-section	6 mm² / 10 AWG
Solid conductor	0.5 ... 6 mm² / 20 ... 10 AWG
Stranded conductor	0.5 ... 6 mm² / 20 ... 10 AWG
Fine-stranded conductor	0.5 ... 6 mm² / 20 ... 10 AWG
Strip length	12 ... 14 mm / 0.47 ... 0.55 inch
Wiring direction	Side-entry wiring

Physical data

Width	36.7 mm / 1.445 inch
Height	10.1 mm / 0.398 inch
Depth	21.1 mm / 0.831 inch

Material data

Note (material data)	Information on material data can be found here
Color	transparent
Cover color	transparent
Flammability class per UL94	V2
Fire load	0.103 MJ
Actuator color	orange
Weight	7.1 g

Environmental requirements

Ambient temperature (operation)	+85 °C
Continuous operating temperature	105 °C
Temperature marking per EN 60998	T85

Commercial data

eCl@ss 10.0	27-14-11-04
eCl@ss 9.0	27-14-11-04
ETIM 7.0	EC000446
ETIM 6.0	EC000446
PU (SPU)	150 (15) Stück
Packaging type	Box
Country of origin VKOrg Germany	CH
GTIN	4055143715478
Customs tariff number VKOrg Germany	85369010000



Approvals and certificates

Country specific Approvals



Approval	Standard	Certificate name
KEMA/KEUR DEKRA Certification B.V.	EN 60998	71-105677

Ship Approvals



Approval	Standard	Certificate name
ABS American Bureau of Ship- ping	EN 60998	18-HG1755093-PDA
DNV GL Det Norske Veritas, Ger- manischer Lloyd	EN 60998	TAE000015T
LR Lloyds Register	EN 60998	04/20013 (E8)

UL-Approvals



Approval	Standard	Certificate name
UL UL International Germany GmbH	UL 486C	E69654

Downloads

Environmental Product Compliance

Compliance Search
Environmental Product Compliance 221-615



Documentation

Additional Information
Technical Section

pdf
2142.18 KB



Bid Text			
221-615	19.02.2019	xml 3.48 KB	
221-615	23.01.2019	docx 15.40 KB	
ausschreiben.de 221-615			

CAD/CAE-Data	
CAD data	CAE data
2D/3D Models 221-615 	ZUKEN Portal 221-615 

1 Compatible products
1.1 Optional accessories
1.1.1 Jumper
1.1.1.1 Jumper






Item no.: 221-941/000-006 Jumper; for conductor entry; 2-way; insulated; blue	Item no.: 221-942/000-006 Jumper; for conductor entry; 2-way; insulated; blue	Item no.: 221-941 Jumper; for conductor entry; 2-way; insulated; dark gray	Item no.: 221-942 Jumper; for conductor entry; 2-way; insulated; dark gray
---	---	--	--

1.1.2 Mounting adapter
1.1.2.1 Mounting accessories



Item no.: 221-510/000-006 Mounting carrier; 221 Series - 6 mm²; for DIN-35 rail mounting/screw mounting; blue	Item no.: 221-510/000-053 Mounting carrier; 221 Series - 6 mm²; for DIN-35 rail mounting/screw mounting; dark gray-yellow	Item no.: 221-510 Mounting carrier; 221 Series - 6 mm²; for DIN-35 rail mounting/screw mounting; orange
---	---	---


Installation notes
Conductor termination



Termination: Lift the lever to open the clamping unit and insert a stripped conductor.

Then, lower the lever to close the clamp.

Application



Wiring fine-stranded conductors in junction boxes.	Custom low-voltage lighting system	Lighting distribution in a ceiling canopy	Pendant light connection in a suspended ceiling
--	------------------------------------	---	---



COMPACT Splicing Connectors for All
Conductor Types (6 mm²), 221 Series