

Technical Data Sheet

Page: 1/1


PBEL Befestigungsschellen

- Suitable for use with Fixpin
- For fastening pipes and pipes to concrete
- Version: single-lobed
- UV-resistant
- Material: Steel, galvanized
- 1-hole, Ø 5.5 mm
- Thickness: 1,20-1,25 mm



Information

Art.-No.	Type	MVE	VPE	For tube Ø mm	For Pipe Ø Metric	For Rohr-Ø PG
05104854	PBEL16	1	250	15-16	16,00	9,00
05104855	PBEL18	1	200	17-18	-	11,00
05104856	PBEL20	1	200	19-20	20,00	13,50
05104857	PBEL22	1	175	21-22	-	-
05104858	PBEL24	1	150	23-24	-	16,00
05104859	PBEL25	1	150	24-25	25,00	-
05104860	PBEL28	1	125	27-28	-	21,00
05104861	PBEL32	1	100	31-32	32,00	-
05104862	PBEL35	1	100	34-35	-	-
05104863	PBEL40	1	100	39-40	40,00	-

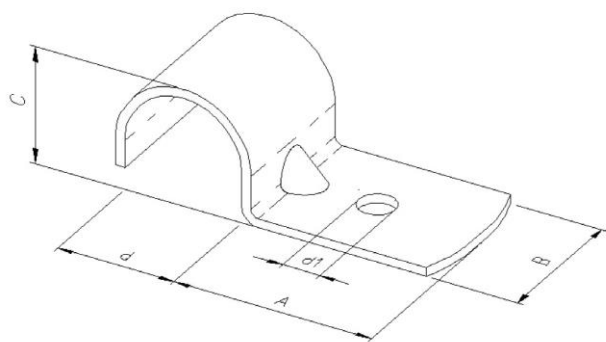

Type	d T	d1 ±1	A ±1	B ±1	C ±1
PBEL16	16	5,5	27,5	15	16
PBEL18	18	5,5	30	15	18
PBEL20	20	5,5	30	15	20
PBEL22	22	5,5	30	15	22
PBEL24	24	5,5	30	15	24
PBEL25	25	5,5	30	15	25
PBEL28	28	5,5	30	20	28
PBEL32	32	5,5	30	20	32
PBEL35	35	5,5	30	20	35
PBEL40	40	5,5	30	20	40

PROTEC Product Management • • • Ludwig-Erhard-Str. 21-39 • • • D-65760 Eschborn • • •
www.protecclass.de

Errors and technical changes excepted. Reproduction and any electronic reproduction only with our written permission.
 All rights reserved. Status: 2021s. © PROTEC.class/PROTEC.net