

Artikel Nr.: 348070

Deckenaufbauleuchte, Arneb, Graphitgrau RAL 7024, 220-240V AC/50-60Hz, Warmweiß

Technische Daten

Charakteristik

Material	Aluminium Druckguss / Kunststoff
Farbe	Graphitgrau RAL 7024
Optik	/ milchig
im Lieferumfang	2x Schrauben, 2x Dübel, 2x Dichtungen 2x Schutzschlauch, 1x Innensechskantschlüssel



Elektrische Daten

Leistung	30,00 W
Eingangsspannung	220-240V AC/50-60Hz
Eingangsstrom	
Fassung / Sockel	
Anzahl Sockel	
Netzgerät	inkl. LED-Netzgerät
Ansteuerung	nicht dimmbar
Anschlussmöglichkeit	Klemme
Schutzklasse I, II, III	I

Lichttechnische Eigenschaften

Leuchtmittel	Lichtquelle fest
Lichtfarbe	Warmweiß
Farbtemperatur	3000 K
Lichtstrom	2300 lm
Abstrahlwinkel	113°
LED Typ	SMD
LED Anzahl	299
Strahlungsverteilung	582 nm




Artikel Nr.: 348070

Deckenaufbauleuchte, Arneb, Graphitgrau RAL 7024, 220-240V AC/50-60Hz, Warmweiß

Lichtrichtung

Dreh- und Schwenkbereich	feststehend
Neigungswinkel	
Abstrahlverhalten	
Reflektor / Linse	

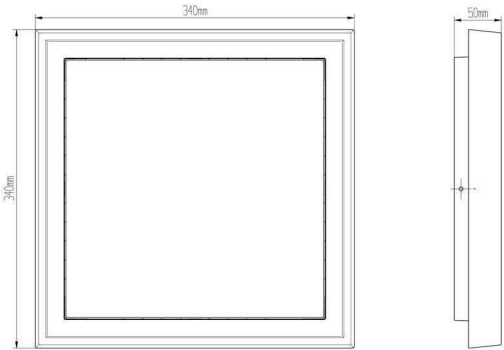

Abmessungen und Gewicht

Länge (mm)	340,00
Breite (mm)	340,00
Höhe (mm)	50,00
Durchmesser (mm)	0,00
Deckenabhängung (mm)	0,00
Gewicht	2336 g

Sockelmaß

Länge (mm)	0,00
Breite (mm)	0,00
Höhe (mm)	12,00
Durchmesser (mm)	270,00

Artikel Nr.: 348070

Deckenaufbauleuchte, Arneb, Graphitgrau RAL 7024, 220-240V AC/50-60Hz, Warmweiß

Grenzwerte

Betriebstemperatur	-5°C - +40°C
Lagertemperatur	-10°C - +60°C
IP - Schutzart	IP54

Allgemeine Eigenschaften

Umwelteigenschaften

Energieeffizienzklasse	G
Energieverbrauch	33 kWh/1000h

Lebensdauer

Lebensdauer	30000 h
Lichtstrom Ende Lebensdauer	0,70
Schaltzyklen	100000

EEI	Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse G
IP54	Schutz gegen das Eindringen von Staub. (Staubschutz) Geschützt gegen Spritzwasser.
	Leuchte der Schutzklasse I bei der der Schutz gegen elektrischen Schlag nicht allein auf der Basisisolierung beruht, sondern die eine zusätzliche Sicherheitsvorkehrung derart enthält, dass berührbare leitfähige Teile mit Mitteln zum Anschluss an den Schutzleiter der festen Installation ausgerüstet sind, so dass im Fehlerfall der Basisisolierung berührbare leitfähige Teile nicht aktiv werden können.

Article no.: 348070

Surface mounted ceiling lamp, Arneb, Graphite grey RAL 7024, 220-240V AC/50-60Hz, warmwhite

**Technical Data****General Characteristics**

Material	aluminum die casting / plastic
Colour	Graphite grey RAL 7024
Optics	/ milky
included in delivery	2x screws, 2x dowels, 2x seals, 2x protection tube, 1x hexagon socket wrench

Electrical Characteristics

Power	30,00 W
Input voltage	220-240V AC/50-60Hz
Input current	
Base (standard designation)	
Number of bases	
Power supply unit	incl. LED-power supply unit
Electronically reversible	not dimmable
Connection possibility	clamp
Protection class I, II, III	I

Light Technical Data

Bulb	Lichtquelle fest
Colour Designation	warmwhite
Colour temperature	3000 K
Luminous flux	2300 lm
Beam angle	113°
LED type	SMD
LED quantity	299
Spectral power distribution	582 nm




Article no.: 348070

Surface mounted ceiling lamp, Arneb, Graphite grey RAL 7024, 220-240V AC/50-60Hz, warmwhite

Light Direction

Rotating and tilting range	fixed
Angle of inclination	
Radiation direction	
Reflector / lense	

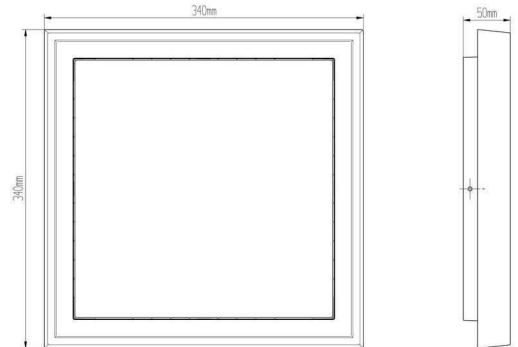**Dimensions & Weight**

Length (mm)	340,00
Width (mm)	340,00
Height (mm)	50,00
Diameter (mm)	0,00
Suspensions from ceiling (mm)	0,00
Product Weight	2336 g

Base dimensions

Length (mm)	0,00
Width (mm)	0,00
Height (mm)	12,00
Diameter (mm)	270,00

Article no.: 348070

Surface mounted ceiling lamp, Arneb, Graphite grey RAL 7024, 220-240V AC/50-60Hz, warmwhite

Absolute maximum ratings

Working temperature	-5°C - +40°C
Storage temperature	-10°C - +60°C
IP - Code	IP54

General product data**Environmental Characteristics**

Energy label	G
Energy consumption	33 kWh/1000h

Lifespan

Lamp life time	30000 h
Luminous flux (end of lifetime)	0,70
Number of switching cycles	100000

EEI	This product contains a light source of energy efficiency class G
IP54	Protection against penetration of dust. (dust protected) Protection against penetration of splashing water.
	Lightings of Protection Class I in which the protection against electric shock is not based solely on isolation, but an additional safety measure contains such a way that accessible conductive parts are equipped with means for connection to the protective conductor of the fixed installation, so that in case of failure of the basic insulation exposed conductive parts cannot be active.