

Artikel Nr.: 733067

Energieverteiler, Steckdosenturm Kukui Puka, Dunkelgrau, 220-240V AC/50-60Hz, 1x max. 13 W

Technische Daten

Charakteristik

Material	Aluminium Druckguss
Farbe	Dunkelgrau
Optik	
im Lieferumfang	

Elektrische Daten

Leistung	1x max. 13 W
max. Anschlussleistung	3680 W
Eingangsspannung	220-240V AC/50-60Hz
Eingangsstrom	16 A
Fassung / Sockel	E27
Anzahl Sockel	
Netzgerät	
Anschlussmöglichkeit	Anschlussbox IP68
Schutzklasse I, II, III	I



Artikel Nr.: 733067

Energieverteiler, Steckdosenturm Kukui Puka, Dunkelgrau, 220-240V AC/50-60Hz, 1x max. 13 W

Lichtrichtung



Dreh- und Schwenkbereich	feststehend
Neigungswinkel	
Abstrahlverhalten	
Reflektor / Linse	symmetrisch

Abmessungen und Gewicht

Länge	140,00
Breite	140,00
Höhe	620,00
Durchmesser	0,00
Gewicht	2130 g

Grenzwerte

Betriebstemperatur	-20°C - +45°C
Lagertemperatur	-10°C - +50°C
IP - Schutzart	IP44

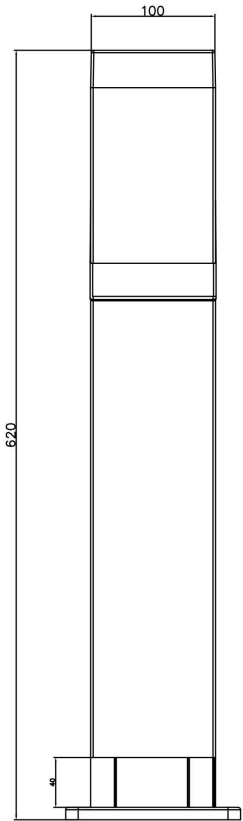

IP44	Schutz gegen das Eindringen von Fremdkörper > 1 mm. Geschützt gegen Spritzwasser.
	Leuchte der Schutzklasse I bei der der Schutz gegen elektrischen Schlag nicht allein auf der Basisisolierung beruht, sondern die eine zusätzliche Sicherheitsvorkehrung derart enthält, dass berührbare leitfähige Teile mit Mitteln zum Anschluss an den Schutzleiter der festen Installation ausgerüstet sind, so dass im Fehlerfall der Basisisolierung berührbare leitfähige Teile nicht aktiv werden können.
	Aufgrund des komplexen Herstellungsprozesses von LED stellen die angegebenen Werte nur rein statistische Größen dar und müssen nicht zwingend den tatsächlichen Parametern jedes einzelnen LED-Moduls entsprechen, sondern können von den typischen Werten abweichen.

Article no.: 733067

Energy distributor, Socket Tower Kukui Puka, dark gray, 220-240V AC/50-60Hz, 1x max. 13 W

Technical Data

General Characteristics

Material	aluminum die casting
Colour	dark gray
Optics	
included in delivery	

Electrical Characteristics

Power	1x max. 13 W
max. Connection Power	3680 W
Input Voltage	220-240V AC/50-60Hz
Input current	16 A
Base (standard designation)	E27
Number of Bases	
Power supply unit	
Connection possibility	Connection box IP68
Protection class I, II, III	I



Article no.: 733067

Energy distributor, Socket Tower Kukui Puka, dark gray, 220-240V AC/50-60Hz, 1x max. 13 W

Light Direction



Rotating and tilting range	fixed
Angle of inclination	
Radiation direction	
Reflector / lense	symmetrisch

Dimensions & Weight

Length	140,00
Width	140,00
Height	620,00
Diameter	0,00
Product Weight	2130 g

Absolute maximum ratings

Working temperature	-20°C - +45°C
Storage temperature	-10°C - +50°C
IP - Code	IP44

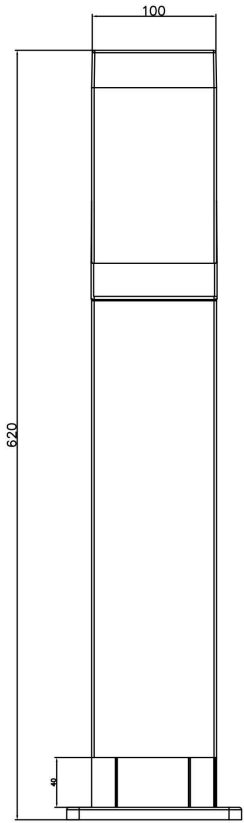

IP44	Protection against penetration of foreign objects > 1 mm. Protection against penetration of splashing water.
	Lightings of Protection Class I in which the protection against electric shock is not based solely on isolation, but an additional safety measure contains such a way that accessible conductive parts are equipped with means for connection to the protective conductor of the fixed installation, so that in case of failure of the basic insulation exposed conductive parts cannot be active.
	Because of the complex manufacturing process of the LED the above shown data are just a statistical size, which is not forced to be the realistic data of every LED.