

Data Sheet

General and Commercial Data

Product Type	Interiors - Wall/Ceiling
Model	GeoLED Lite
Code	75422
Description	GEO LED 20W OVAL WHITE 3K
EAN Code	8002219722898
Available Colors	White RAL 9010
Application	Secondary Areas
Net Weight [kg]	0.5
Dimensions [mm]	270x145x74
Pieces per Pack	12

Technical Characteristics

Volume [m3]	0.0033
Insulation Class	II
IP Code	65
Impact Resistance IK Rating	7
Fire Resistance [°C]	850
Voltage [V]	230
Frequency [Hz]	50
Power Factor (cos(φ))	0.55
Luminaire Power [W]	20
Battery Life [h]	---
Luminaire Flux [lm]	1650
Luminous Efficacy [lm/W]	83
Range Ambient Temperature [°C]	-20 ÷ 40
Ballast	For constant current LED
Source	CCT 3000 K - CRI 80
Average Life [h]	30000
Source Flux [lm]	1650

Photometric Parameters


Measurement	75422o
CIE Code	[46,78,95,100,100]
Optics Type	Symmetrical

Notes

Possible Flux configurations [lm]: 1650
 Possible Power configurations [W]: 20
 Possible CCT configurations [K]: 3000

Norms

CEI EN 60598-2-2
 2014/35/EU
 2014/30/EU
 874/2012/CE
 2009/125/CE
 EN 62471
 CEI EN 60598-1

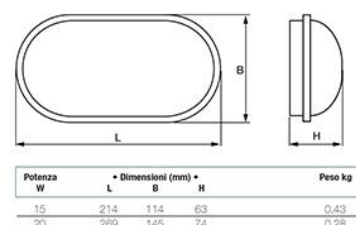

Marks

