

Data Sheet

General and Commercial Data

Product Type	Interiors - Recessed Luminaires
Model	LED Panel
Code	40110
Description	L PAN 30X120 U19 C90 SD 4K
EAN Code	8002219755360
Available Colors	White RAL 9010
Application	Offices,Public Areas,Commercial Areas
Net Weight [kg]	4.9
Dimensions [mm]	1196x296x41
Pieces per Pack	5

Technical Characteristics

Volume [m3]	0.014669
Insulation Class	II
IP Code	20
Impact Resistance IK Rating	5
Fire Resistance [°C]	650
Material	Aluminium extrusion
Voltage [V]	230
Frequency [Hz]	50
Power Factor (cos(φ))	0.96
Luminaire Power [W]	36
Battery Life [h]	---
Luminaire Flux [lm]	4000
Luminous Efficacy [lm/W]	112
Range Ambient Temperature [°C]	-20 ÷ 40
Ballast	Constant current LED Smart driver (programmable)
Source	CCT 4000 K - CRI 90
Average Life [h]	50000
Source Flux [lm]	4000
Photobiological Risk Index (EN 62471)	Risk 0

Photometric Parameters


Measurement	40110o
CIE Code	[57,90,99,100,100]
Optics Type	Symmetrical

Notes


Possible Flux configurations [lm]: 4000
 Possible Power configurations [W]: 36
 Possible CCT configurations [K]: 4000

Norms

2014/35/EU
 2014/30/EU
 874/2012/CE
 2009/125/CE
 EN 62471
 CEI EN 60598-1
 CEI EN 60598-2-2

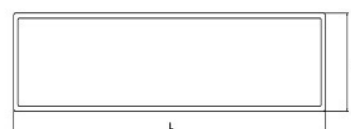

• Dimensioni (mm) •				Peso
L	B	H	H1	kg
1196	296	9	41	4,9

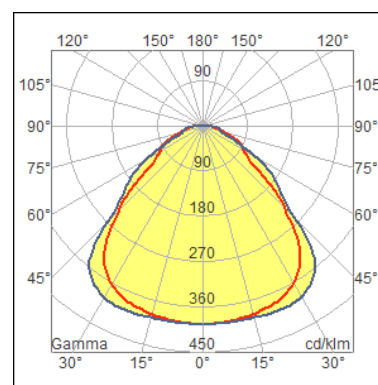

Marks

