

BEGA**22 652**

Ceiling and wall luminaire



Project · Reference number

Date

Product data sheet

Application

Luminaire with high constructive strength.
The thick-walled crystal glass with optical structure distributes the light uniformly.

Product description

Luminaire made of aluminium alloy,
aluminium and stainless steel
BEGA Unidure® coating technology
Crystal glass, white inside
2 mounting holes $\varnothing$ 5.5 mm
Distance apart 89 mm
2 cable entries for through-wiring of mains
supply cable $\varnothing$ 7-10.5 mm
Connecting terminal and
earth conductor terminal 2.5²
LED power supply unit
220-240 V $\sim$ 0/50-60 Hz
BEGA Thermal Control®
Temporary thermal regulation to protect
temperature-sensitive components without
switching off the luminaire
Safety class I
Protection class IP 65
Dust-tight and protection against water jets
Impact strength IK07
Protection against mechanical
impacts < 2 joule
 – Safety mark
 – Conformity mark
Weight: 4.2 kg
This product contains light sources of energy
efficiency class(es) C, D

Inrush current

Inrush current: 5 A / 40 μ s
Maximum number of luminaires of this
type per miniature circuit breaker:

B 10A: 50 luminaires
B 16A: 50 luminaires
C 10A: 80 luminaires
C 16A: 80 luminaires

Lamp


Module connected wattage 6.6 W
Luminaire connected wattage 7.7 W
Rated temperature $t_a = 25^\circ\text{C}$
Ambient temperature $t_{a\text{ max}} = 60^\circ\text{C}$

22 652 K3

Module designation LED-0262/930
Colour temperature 3000 K
Colour rendering index CRI > 90
Module luminous flux 1115 lm
Luminaire luminous flux 583 lm
Luminaire luminous efficiency 75,7 lm/W

22 652 K4

Module designation LED-0262/940
Colour temperature 4000 K
Colour rendering index CRI > 90
Module luminous flux 1180 lm
Luminaire luminous flux 617 lm
Luminaire luminous efficiency 80,1 lm/W

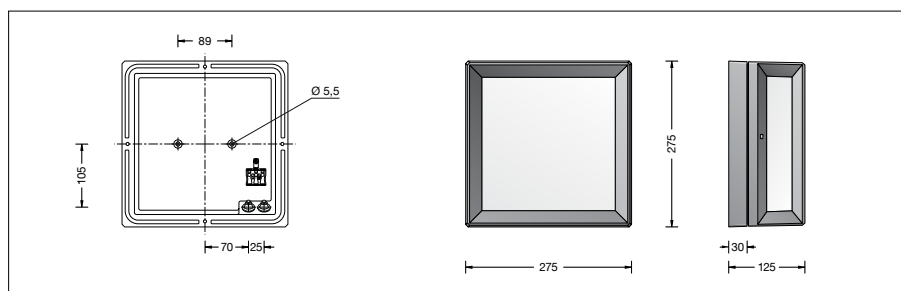

Service life · Ambient temperature

Rated temperature $t_a = 25^\circ\text{C}$
LED psu: > 50,000 h
LED module: > 200,000 h (L 80 B 50)
100,000 h (L 90 B 50)

Ambient temperature max. $t_a = 60^\circ\text{C}$ (100 %)

LED psu: 50,000 h
LED module: > 200,000 h (L 80 B 50)
100,000 h (L 90 B 50)

Lighting technology

Luminaire data for the DIALux lighting design
program for outdoor lighting, street lighting
and indoor lighting, as well as luminaire data in
EULUMDAT and IES format are available on the
BEGA website at www.bega.com.

Ratio of luminous flux

Luminous flux upper half-space 16,5 %
Luminous flux lower half-space 83,5 %

BUG rating according to IES TM-15-07:
0-2-1

CEN Flux Code according to EN 13032-2:
39-70-90-83-100-5-28-63-17

Article No. 22 652

LED colour temperature optionally 3000 K
or 4000 K
3000 K – Article number + **K3**
4000 K – Article number + **K4**

Colour graphite or silver
graphite – article number
silver – article number + **A**

Light distribution

