

BEGA**66 860**

Lichtbaustein®



Project · Reference number

Date

Product data sheet

Application

Lichtbaustein® Rectangle
Wall luminaire for corner mounting.
The luminaire is ideal for places where a soft
and uniform lighting distribution is required.
For interior and exterior applications.

Product description

Luminaire made of aluminium alloy
and stainless steel
BEGA Unidure® coating technology
Opal glass satin matt
1 fixing hole \varnothing 7 mm
1 cable entry for mains supply cable
up to \varnothing 10,5 mm
Lamp holder terminal 2.5[□]
Earth conductor connection
Lamp holder E 27
Safety class I
Protection class IP 44
Protected against granular foreign bodies
 \geq 1 mm and splash water
Impact strength IK02
Protection against mechanical
impacts < 0.2 joule
 – Safety mark
CE – Conformity mark
Weight: 0.85 kg

Lamp

Luminaire with screw base E 27
Lamp output max. 75 W
This product contains light source of energy
efficiency class E

Supplied lamp

BEGA LED lamp **13584**



LED Retrofit 7 W · 805 lm · 3000 K

Luminaire efficiency: 68%

Additional BEGA LED lamps are available for
this luminaire:

13586 LED 7 W · 805 lm · 3000 K
dimmable

Detailed technical and lighting data for the
lamps can be found in the data sheets on our
website.

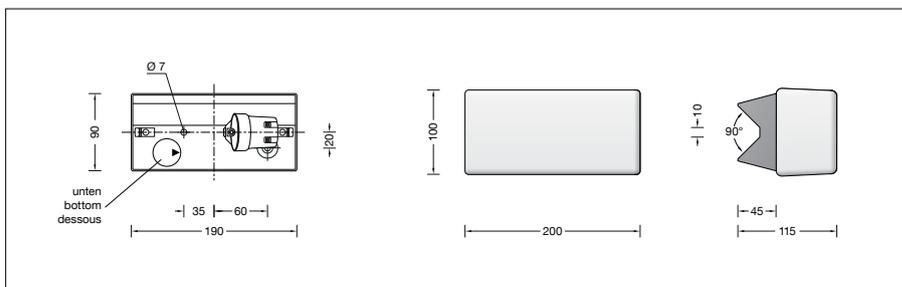

Lighting technology

Luminaire data for the DIALux lighting design
program for outdoor lighting, street lighting
and indoor lighting, as well as luminaire data in
EULUMDAT and IES format are available on the
BEGA website at www.bega.com.

Ratio of luminous flux

Luminous flux upper half-space	53,7 %
Luminous flux lower half-space	46,3 %

BUG rating according to IES TM-15-07:
0-3-1

CEN Flux Code according to EN 13032-2:
17-42-70-46-68-21-47-74-54

Light distribution

