

BEGA**31 406**

Wall luminaire

 IP 44

Project · Reference number

Date

Product data sheet

Application

Wall luminaire for many lighting tasks in or on buildings.

Luminaire distinguished by its high corrosion resistance.

Product description

Luminaire made of copper,

brass and stainless steel

Antique glass

Wall mounting with a mounting plate made of

stainless steel, Steel grade number 1.4301

Mounting plate with 2 fixing

holes \varnothing 5.5 mm · 70 mm spacing

1 cable entry for mains supply cable

up to \varnothing 10,5 mm

Connecting terminal 2.5²

with plug connection

Earth conductor connection

Lampholder E 27

Safety class I

Protection class IP 44


Protected against granular foreign bodies

\geq 1 mm and splash water

Impact strength IK02

Protection against mechanical

impacts < 0.2 joule

 – Safety mark

CE – Conformity mark

Weight: 3.8 kg

Lamp

Luminaire with screw base E 27

Lamp output max. 100 W

This product contains light source of energy efficiency class E

Supplied lamp

BEGA LED lamp **13590**

LED Retrofit 12 W · 1400 lm · 3000 K

Luminaire efficiency: 66%

Additional BEGA LED lamps are available for this luminaire:

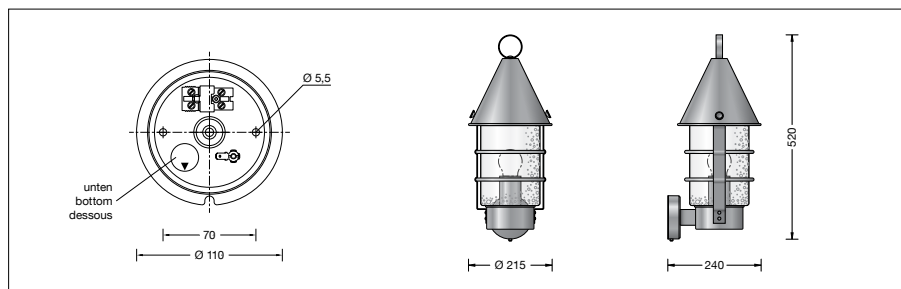
13584 LED 7 W · 805 lm · 3000 K

13586 LED 7 W · 805 lm · 3000 K
dimable

13588 LED 8 W · 1055 lm · 3000 K

13592 LED 12 W · 1400 lm · 3000 K
dimable

Detailed technical and lighting data for the lamps can be found in the data sheets on our website.

**Lighting technology**

Luminaire data for the DIALux lighting design program for outdoor lighting, street lighting and indoor lighting, as well as luminaire data in EULUMDAT and IES format are available on the BEGA website at www.bega.com.

Copper

The luminaire parts made of solid copper are delivered with the metal's natural surface colour. Time and weather factors create the natural patina characteristic for copper.