


BEGA**24 067**

Compact downlight



Project · Reference number

Date

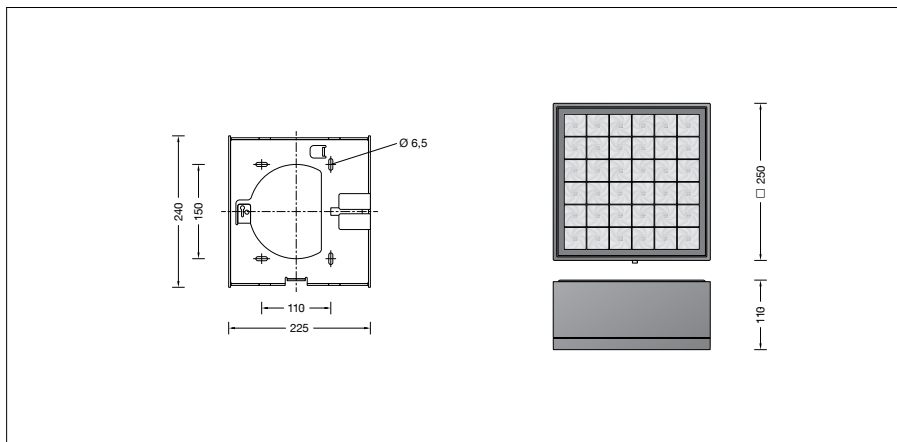

Product data sheet

Product description

Luminaire made of aluminium alloy, aluminium and stainless steel
 BEGA Unidure® coating technology
 Colour graphite or white
 Safety glass with optical structure
 Reflector surface made of pure aluminium
 BEGA Vortex Optics®.
 Mounting plate with 4 elongated holes, width 6.5 mm, distance 150 x 110 mm
 Connection box with 2 cable entries for through-wiring of the mains supply cable \varnothing 5-13 mm, max. 5x2,5[□]
 LED power supply unit
 220-240 V ~ 0/50-60 Hz
 DC 176-280 V
 During DC operation the LED power is reduced to 15 %
 DALI-controllable
 Number of DALI addresses: 1
 Basic insulation is provided between the mains and control cables
 BEGA Thermal Control®
 Temporary thermal regulation to protect temperature-sensitive components without switching off the luminaire
 Safety class I
 ⚡ Ballproof according to DIN VDE 0710 part 13
 Protection class IP 65
 Dust-tight and protection against water jets
 Impact strength IK09
 Protection against mechanical impacts < 10 joule
 ⚡ – Safety mark
 CE – Conformity mark
 Weight: 5.2 kg
 This product contains light sources of energy efficiency class(es) D

Application

Compact downlight with symmetrical wide beam light distribution.

Lamp

Module connected wattage 62.4 W
 Luminaire connected wattage 69 W
 Rated temperature $t_a = 25^\circ\text{C}$
 Ambient temperature $t_{a\text{ max}} = 45^\circ\text{C}$

24 067 K3

Module designation 4x LED-0586/830
 Colour temperature 3000 K
 Colour rendering index CRI > 80
 Module luminous flux 10760 lm
 Luminaire luminous flux 8261 lm
 Luminaire luminous efficiency 119,7 lm/W

24 067 K4

Module designation 4x LED-0586/840
 Colour temperature 4000 K
 Colour rendering index CRI > 80
 Module luminous flux 10910 lm
 Luminaire luminous flux 8368 lm
 Luminaire luminous efficiency 121,3 lm/W

Service life · Ambient temperature

Rated temperature $t_a = 25^\circ\text{C}$
 LED psu: > 50,000 h
 LED module: > 200,000 h (L80 B50)
 100,000 h (L90 B50)

Ambient temperature max. $t_a = 45^\circ\text{C}$ (100 %)
 LED psu: 50,000 h
 LED module: 170,000 h (L80 B50)

Ambient temperature max. $t_a = 50^\circ\text{C}$ (56 %)
 LED psu: > 50,000 h
 LED module: > 50,000 h (L70 B50)

BEGA Thermal Control® protects temperature-sensitive luminaire components by temporarily limiting the nominal power at high temperatures.

Inrush current

Inrush current: 50 A / 209 μs
 Maximum number of luminaires of this type per miniature circuit breaker:

B 10A: 6 luminaires
 B 16A: 10 luminaires
 C 10A: 10 luminaires
 C 16A: 16 luminaires

Ratio of luminous flux

Luminous flux upper half-space 0 %
 Luminous flux lower half-space 100 %

BUG rating according to IES TM-15-07:
 4-0-0

CEN Flux Code according to EN 13032-2:
 96-99-100-100-100

Light technique

Symmetrical wide beam light distribution
 Half beam angle 38°
 Luminaire data for the light planning program DIALux for outdoor lighting, street lighting and indoor lighting, as well as luminaire data in EULUMDAT and IES format are available on the BEGA website at www.bega.com.

BEGA Vortex Optics®

BEGA Vortex Optics® features newly developed twisted reflectors with a surface made of pure aluminium. The more intense concentration of the light enables perfect light deflection. This makes it possible to achieve optimal light distribution without artefacts. Thanks to excellent glare control, BEGA Vortex Optics® offers outstanding visual comfort. The interaction with the LED modules produces extraordinary lighting results.

Article No. 24 067

LED colour temperature optionally 3000 K or 4000 K

3000 K – Article number + **K3**
 4000 K – Article number + **K4**

Colour optionally graphite or white
 Graphite – Article number
 White – Article number + **W**

Light distribution