



BEGA**77 117**

In-ground luminaire



Project · Reference number

Date

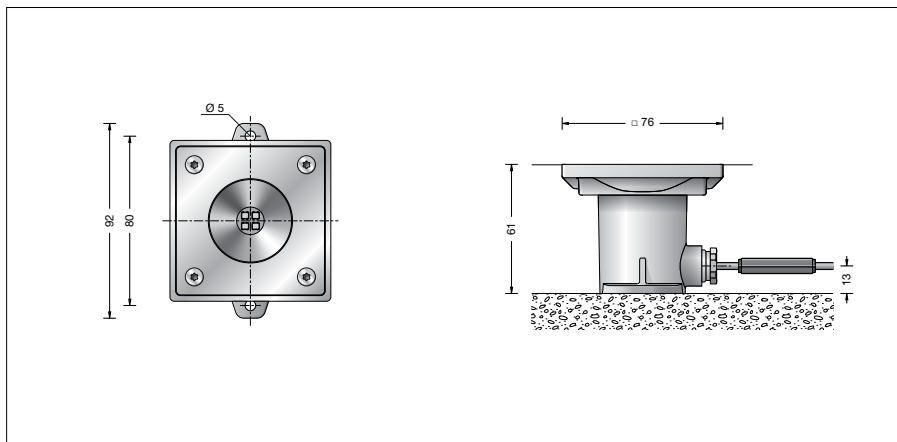

Product data sheet

Application

Floodlight with symmetrical light distribution.
For recessed mounting in compacted surfaces,
paths and places.
Drive-over luminaire for vehicles with pneumatic
tyres.

Please note:

Luminaire must not be used for installation in
road lanes, where the fixture is exposed to a
horizontal strain due to braking, acceleration
and change of direction.

Product description

Cover ring Luminaire housing made of
stainless steel and cast stainless steel
Steel grade number 1.4301
Clear safety glass
Reflector made of pure anodised aluminium
2 mounting holes $\varnothing$ 5 mm
Distance apart 80 mm
1,8 m water-resistant connecting cable
05RN8-F 2 x 1[□] with implemented water
stopper and 1.2 m PVC cable conduit
Safety class III
Protection class IP 68 10 m
Dust-tight and water pressure tight
Maximum submersion depth 10 m
Not suitable for permanent operation under water
Pressure load 2,000 kg (~20 kN)
Impact strength IK10
Protection against mechanical
impacts < 20 joule
Maximum surface temperature 20 °C
(measured according to EN 60598 of ta 15 °C)
 – Safety mark
 – Conformity mark
Weight: 0.7 kg

Lamp

Module connected wattage 1.2 W
Luminaire connected wattage 1.5 W
Rated temperature $t_a = 25$ °C
Ambient temperature $t_{a \max} = 65$ °C
When installed in heat-insulating
material $t_{a \max} = 55$ °C
Voltage 24 V = DC

77 117 K4

Module designation LED-0268/840
Colour temperature 4000 K
Colour rendering index CRI > 80
Module luminous flux 225 lm
Luminaire luminous flux 142 lm
Luminaire luminous efficiency 94,7 lm/W

77 117 K3

Module designation LED-0268/830
Colour temperature 3000 K
Colour rendering index CRI > 80
Module luminous flux 220 lm
Luminaire luminous flux 139 lm
Luminaire luminous efficiency 92,7 lm/W

Service life · Ambient temperature

Rated temperature $t_a = 25$ °C
LED module: > 200,000 h (L 80 B 50)
100,000 h (L 90 B 50)

Ambient temperature max. $t_a = 65$ °C (100 %)
LED module: 77,000 h (L 80 B 50)
100,000 h (L 70 B 50)

Lighting technology

Half beam angle 44°
Luminaire data for the light planning program
DIALux for outdoor lighting, street lighting and
interior lighting as well as luminaire data in
EULUMDAT and IES format are available on our
website www.bega.com.

Article No. 77 117

LED colour temperature optionally 4000 K
or 3000 K
4000 K – Article number + **K4**
3000 K – Article number + **K3**

Accessories

Power supply unit for LED luminaires 24 V DC
Safety transformer according to
DIN EN 61558/VDE 0570 part 2-6

70 564 Power supply unit for 5-15 W
70 465 Power supply unit for 10-25 W
70 565 Power supply unit for 20-35 W
70 566 Power supply unit for 30-50 W
70 567 Power supply unit for 40-75 W
70 169 Power supply unit for 70-150 W
230 V ~ 50-60 Hz

70 114 Power supply unit for 0-42 W
AC range: AC: 110-264 V ~ 50-60 Hz
DC range: DC: 170-280 V

The power supply units are also suitable for
the operation of several LED luminaires. In
this case, the maximum wattage of the power
supply unit must not be exceeded.

Distribution box for installation in soil

70 730 Distribution box with 7 cable entries
Connection terminals 5 x 4[□]

71 053 Distribution box with 10 cable entries
Connection terminals 6 x 16[□]

For the accessories a separate instructions
for use can be provided upon request.

Light distribution

