

GRUS S LED1X1500 C314 T730 L30 • 1108738

Product:	Grus S LED1x1500 C314 T730 L30
Order code:	1108738
Family:	Grus S LED
Product group:	Outdoor accent lighting

GENERAL DATA

Description:	Surface mounted accent LED luminaire Light distribution type: direct Optical system: lenses, tempered glass diffuser, impact resistant Housing: aluminium Colour: dark grey (RAL7043)
Installation:	On the horizontal or vertical surface. Cable, 0.3m, 3x0.75mm2
Environment	Outdoor
Application	public space, facade illumination

ELECTRICAL DATA

Mains voltage:	220-240V, 50/60Hz	System power*, W:	10,7
Power factor:	>0,5	Control gear:	ECG on/off
Connection:	Cable, 0.3m, 3x0.75mm2		

LIGHTING DATA


Light source and cap, W:	LED	Light source included:	yes
Luminaire output*, lm(ta+25°C):	1391	System efficacy, lm/W:	130
CRI (Ra):	70+	CCT, K:	3000
SDCM:	5	Light Distribution:	Symmetrical medium beam (31°...75°)
Distribution Type:	Direct	Beam angle, °:	32
LED lifetime, h:	50000/L70B50		

TECHNICAL DATA


Net weight, kg:	0.9	Quantity in package, pcs:	1
Packaging volume, m3/pcs:	0.0018	Pallet quantity, pcs:	470
Dimensions, mm:	120x120x90		

STANDARDS

Operating temperature range, °C:	-25...+40 C	Protection class IEC:	I
Ingress protection code:	IP65	Mechanical impact resistance:	IK08
EEC:	D	Certificates:	CE, UKCA, RoHS
Warranty:	3 years		
Technical drawing (.jpg)			

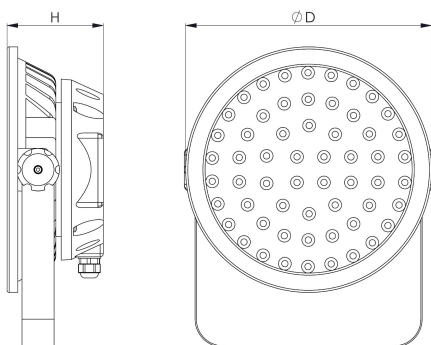

Light distribution curve (.jpg)

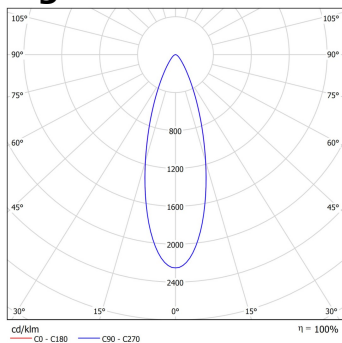

Note:

Tolerance range for optical and electrical data: $\pm 10\%$. Values apply to an ambient temperature of 25 C. NORTHCLIFFE LIGHTING is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification

Date of issue: 2023-05-17 ■ NORTHCLIFFE LIGHTING, UAB ■ Raudondvario pl. 101, LT-47184 Kaunas, Lithuania ■ info@northcliffe.org ■ www.northcliffe.org