

MIRA LED1X1400 D552 T830 OP • 1023755

Product:	Mira LED1x1400 D552 T830 OP
Order code:	1023755
Family:	Mira LED
Product group:	Plastikiniai šviestuvai

GENERAL DATA

Description:	A surface mounted mirror LED luminaire Light distribution type: direct Optical system: opal polycarbonate diffuser Housing: aluminium Colour: white
Installation:	On the wall (mounting brackets included). Screw terminal, 2x1.5mm2
Environment	Indoor
Application	hotel, bathroom, healthcare

ELECTRICAL DATA

Mains voltage:	220-240V, 50/60Hz	System power*, W:	15
Power factor:	>0,55	Control gear:	ECG on/off
Integrated sensor:	None	Connection:	Screw terminal, 2x1.5mm2

LIGHTING DATA

Light source and cap, W:	LED	Light source included:	yes
Luminaire output*, lm(ta+25°C):	1400	System efficacy, lm/W:	93
CRI (Ra):	80+	CCT, K:	3000
SDCM:	5	Light Distribution:	Wide-wide beam (C0-C180 plane 76 ...125 , C90-C270 plane 76 ...125)
Distribution Type:	Direct	Beam angle, °:	156x103
LED lifetime, h:	30000/L70B50		


TECHNICAL DATA

Net weight, kg:	0.54	Quantity in package, pcs:	1
Packaging volume, m3/pcs:	0.0029	Pallet quantity, pcs:	400
Dimensions, mm:	600x53x65		


STANDARDS

Operating temperature range, °C:	ta 0...+35	Protection class IEC:	II
Ingress protection code:	IP44	Mechanical impact resistance:	IK04
EEC:	F	Certificates:	CE, RoHS
Warranty:	3 years		

Technical drawing (.jpg)

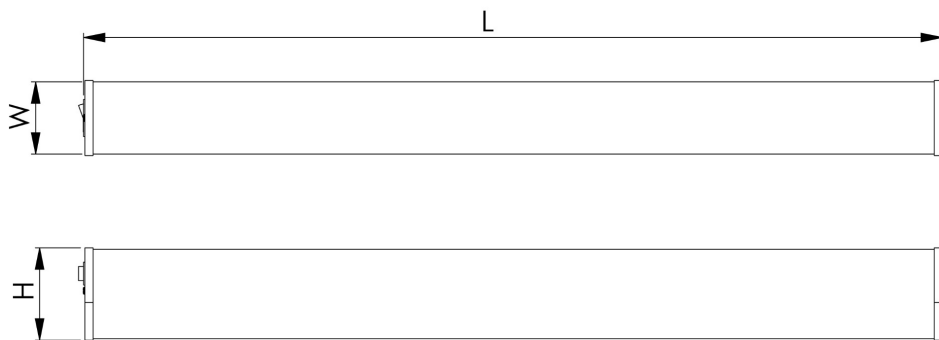

Light distribution curve (.jpg)



Note:

Tolerance range for optical and electrical data: $\pm 10\%$. Values apply to an ambient temperature of 25°C. NORTHCLIFFE LIGHTING is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification

Date of issue: 2023-05-19 ■ NORTHCLIFFE LIGHTING, UAB ■ Raudondvario pl. 101, LT-47184 Kaunas, Lithuania ■ info@northcliffe.org ■ www.northcliffe.org