


# DATA SHEET

## FIBERGLASS ROD Ø 3 MM SET

Cable pulling aids for not guided pipellines

Item no.: **20457**

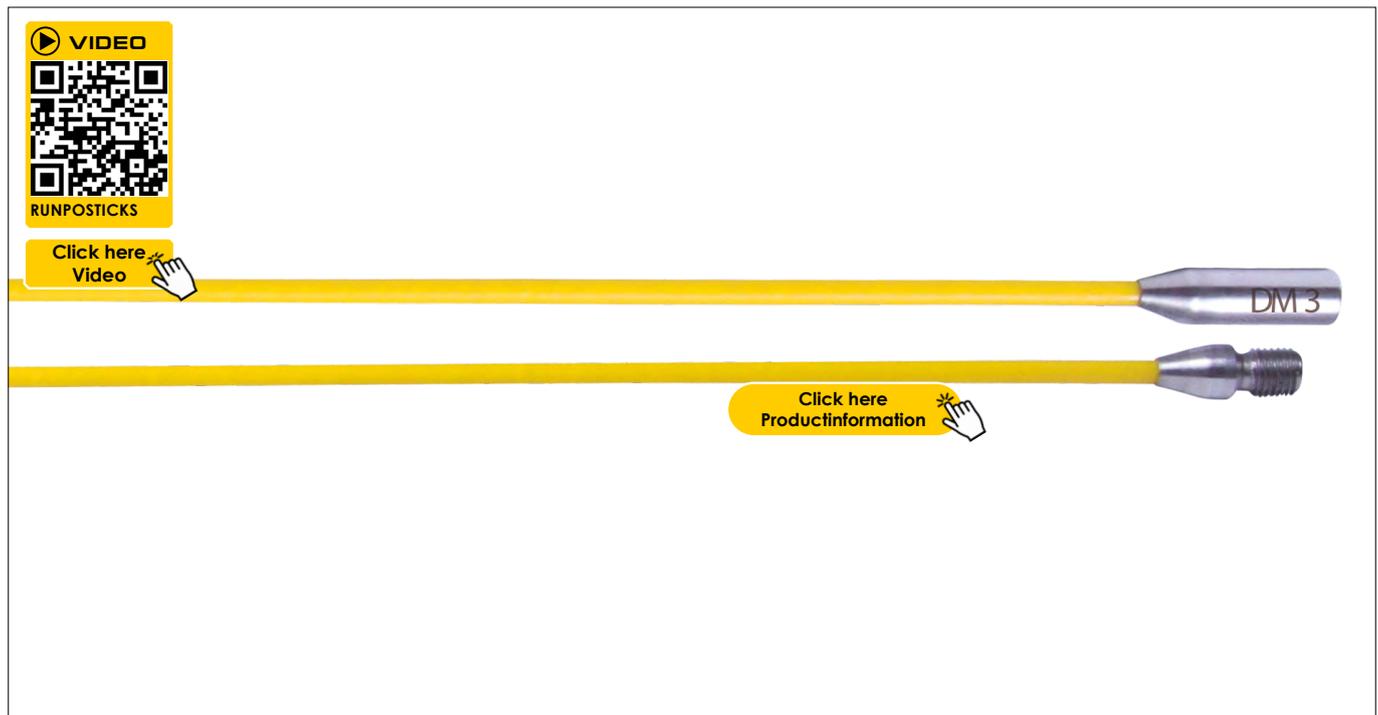

### DATA

ITEM NO.	<b>20457</b>
DIAMETER	Ø 3 mm
THREAD	RUNPOTEC RTG Ø 6 mm
DIMENSION	L 450 x B 30 x H 30 mm
EAN-Code	9120045474848

### ADVANTAGES

- ✓ Guide probe for narrow bends
- ✓ Bending radius 55 mm
- ✓ Standard RTG Ø 6 mm thread

### DESCRIPTION

The Ø 3 mm glass fibre rod 0.45 m is mainly used in combination with the RUNPOSTICKS as an additional guide probe.

The uniform RUNPOTEC RTG Ø 6 mm thread allows a wide variety of combinations. All accessories can be screwed on without an additional adapter.

**Optimal area of application:** suspended ceilings, cable shafts, hollow walls, rewiring for non-guided cables, underfloor shafts, bushings etc...

**Application video:** a short, very informative application video can be viewed by scanning the QR code or on [www.runpotec.com](http://www.runpotec.com).

**Scope of delivery:** 2 pcs. glass fibre rod Ø 3 mm - length 0.45 m

### INFORMATION

**Use with:**

#### RUNPOSTICKS

Paket: Comfort | Standard

Item no.: 10020 | 10016



Click here Productinformation