


## AXPK-PLUS 4G16

1kV underground cable with aluminum conductors

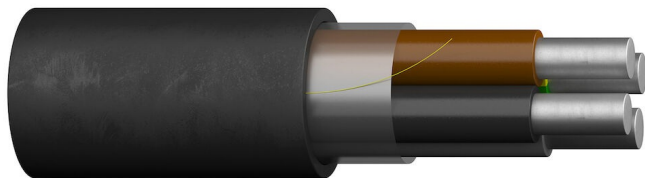

### APPLICATION

Halogen-free power cable with aluminium conductor. For fixed indoor and outdoor installation, perfect for ploughing down.

### CERTIFICATIONS AND DESIGN STANDARDS

<b>HD 603-5D</b>	Distribution cables of rated voltage 0,6/1 kV
<b>EN 60228</b>	Conductor standard
<b>IEC 60502-1</b>	1 kV & 3 kV power cables with extruded insulation.
<b>EN 50575:2014/A1:2016</b>	Cables for general applications in construction works subject to reaction to fire requirements
<b>HD 308 S2</b>	Identification of cores in cables and flexible cords
<b>EN 60332-1-2</b>	Vertical flame propagation for a single insulated wire or cable
Conductor material	Aluminium
Conductor surface	Bare
Core insulation material	XLPE
Core identification (acc. HD 308 S2)	Yes
Material outer sheath	Halogenfree polymer
Max. conductor temperature [°C]	90
UV resistant	Yes
Permitted cable outer temperature during assembling/handling (min) [°C]	-20
Bending radius (rule)	12xD
Reaction-to-fire class (acc. EN 13501-6)	Eca
Flame retardant	In accordance with EN/IEC 60332-1-2

## PRODUCT PROPERTIES

Conductor category	Class 1 = solid
Shape of conductor	Round
Nominal cross section conductor [mm²]	16
Number of cores	4
With protective conductor	Yes
Colour outer sheath	Black
Nominal outer diameter [mm]	19
Conductor resistance at 20° C [Ohm/km]	1.91
Current carrying capacity in air [A]	75
Current carrying capacity in ground [A]	78
Cable weight [kg/km]	320
Min. bending radius during installation [mm]	220
DOP number	1002766

Current load in air, installation method E, temperature 25°C

Current load in ground, installation method D2 (directly in ground). Ground temperature 15°C, thermal resistivity 1,0 K·m/W

Item name	EAN-code (GTIN)	Packaging type	Standard packaging quantity
AXPK-PLUS 4G16 RE	4741532120106	Drum	1,000