


Suno™
Lighting control 20 AX

Cat. No(s): 7 21X 03

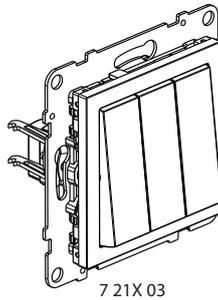

7 21X 03


1. USE

Lighting controls mechanism 20 AX - 250 V~.
 Flush-mounting or surface-mounting.
 Screw and/or claw fixing.


2. RANGE

Description	White	Ivory	Aluminum	Black
1-WAY 3-GANG SWITCH	7 211 03	7 212 03	7 213 03	7 214 03

3. DISMANTLING

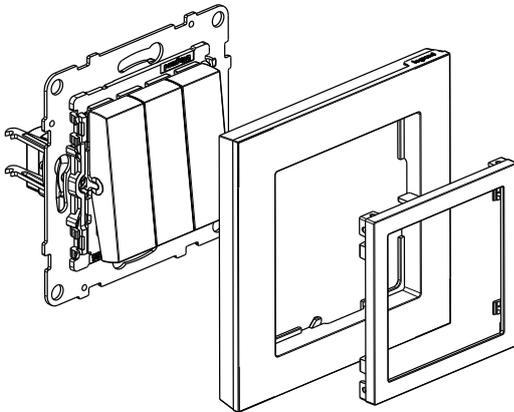

4. DIMENSIONS (mm)

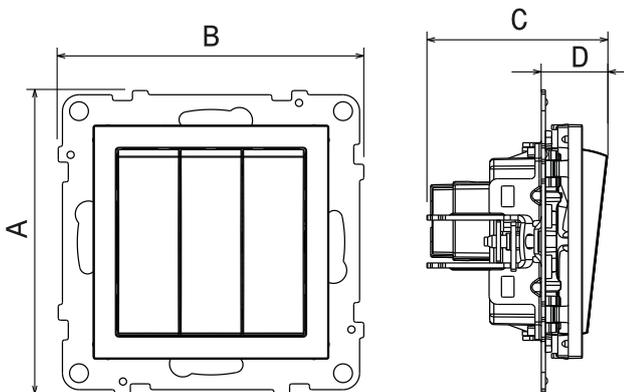

References	A	B	C	D
7 21X 03	72,9	72,9	43	15,7

5. CONNECTION

Flexible or rigid cables compatible.

TYPE OF TERMINALS:
 Auto terminal
 Screw terminal

Tightening torque:
 0,8 Nm

TERMINAL CAPACITY:
 6 x 2.5mm²

STRIPPING LENGTH:
 13mm

SCREWDRIVER:
 Posidrive 1, Flat 4mm

6. TECHNICAL CHARACTERISTICS

■ **6.1 Mechanical characteristics**

Protection against solid bodies and liquids: IP20
 Protection against impact: IK04

■ **6.2 Material characteristics**

Polygloss appearance

Colour molded:
 - White RAL 9003
 - Ivory RAL 1013

Matt colour painted:
 - Aluminum RAL 9023
 - Black RAL 9017

Material:
 - Rocker ABS
 - Base: Polycarbonate
 - Halogen-free
 - UV resistant

Self-extinguishing:
 850°C/30 s for installing components holding live parts in place
 650°C/30 s for other insulating components

■ 6.3 Electrical characteristics

Voltage: 250 V~

Current: 20 AX

Frequency: 50/60 Hz

Max. power for self-ballasted lamps: 250W

■ 6.4 Climatic characteristics


Usage temperature: -5°C to +35°C

Storage temperature: -10°C to +70°C

■ 6.5 Support

Material of support: -Metal

Angular adjusting:

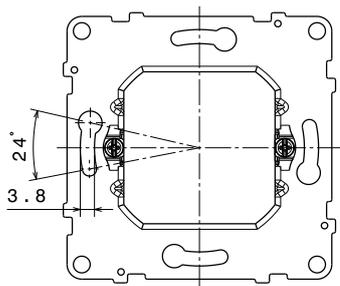


■ 6.6 Fixing with claws

Number of turns to open the claws:

- 58 mm > 2,1 turns

- 65 mm > 2,75 turns

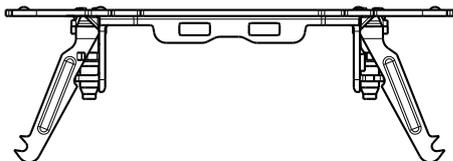

Performance of double teeth claws: extraction resistance

7. MAINTENANCE

Surface cleaning with a cloth.

Do not use:

Acetone, tar remover, trichloroethylene.

Maintenance with the following products:

Hexane (EN 60669-1), Methylated spirit, Soapy water, Diluted ammonia,

Bleach diluted to 10%, Window-cleaning products.

Caution: Always test before using other special cleaning products.

8. STANDARDS AND APPROVALS

Compliant with installation and manufacturing standards.

Refer to e. catalogue..