



Ledinaire panel

RC065B LED34S/840 PSU W60L60 NOC

- Power supply unit (ON/OFF)

The Philips Ledinaire panel Gen4 (RC065B) range features a selection of popular off-the-shelf LED luminaires that come with Philips high quality levels at a competitive price. Reliable, energy efficient and affordable, this latest generation of 600 x 600 mm Ledinaire LED panel lights are designed for diffuse, comfortable lighting in a wide range of general lighting applications. Our range of Ledinaire panel lighting is also available with accessories for easy installation on different types of ceilings – just what you need

Product data

General Information		Optic type		Beam angle 120°
Light source replaceable	No	Luminaire light beam spread	120°	
Number of gear units	1 unit	Unified glare rating CEN	19	
Driver included	Yes			
Service tag	No	Operating and Electrical		
Lighting Technology	LED	Input Voltage	220-240 V	
Value ladder	Value	Line Frequency	50 or 60 Hz	
		Input Frequency	50 or 60 Hz	
		Initial CLO power consumption	- W	
		Average CLO power consumption	- W	
		Power Consumption	34 W	
		Inrush current	16 A	
		Inrush time	0.18 ms	
		Power Factor (Fraction)	0.9	
		Connection	Push-in connector 2-pole	
		Cable	-	
		Number of products on MCB of 16 A type B	32	
Light Technical				
Luminous Flux	3,400 lumen			
Saturated Red (R9)	<50			
Correlated Color Temperature (Nom)	4000 K			
Luminous Efficacy (rated) (Nom)	100 lm/W			
Color rendering index (CRI)	>80			
Flickering value (PstLM)	1			
Stroboscopic effect value (SVM)	0.4			
Beam angle of light source	- degree(s)			
Light source color	840 neutral white			


Ledinaire panel

Temperature	
Ambient temperature range	-10 to +25 °C
Controls and Dimming	
Dimmable	No
Driver/power unit/transformer	Power supply unit (ON/OFF)
Control interface	-
Constant light output	No
Mechanical and Housing	
Housing Material	Steel
Reflector material	Acrylate
Optic material	Polystyrene
Optical cover/lens material	Acrylate
Fixation material	-
Housing Color	White
Optical cover/lens finish	Opal
Overall length	595 mm
Overall width	595 mm
Overall height	35 mm
Dimensions (Height x Width x Depth)	35 x 595 x 595 mm
Approval and Application	
Ingress protection code	IP20 [Finger-protected]
Mech. impact protection code	IK02 [0.2 J standard]
Sustainability rating	-
Protection class IEC	Safety class II
Glow-wire test	Temperature 650 °C, duration 30 s
Flammability mark	For mounting on normally flammable surfaces
CE mark	Yes
ENEC mark	-
Warranty period	3 years
Photobiological risk	Photobiological risk group 0 @200mm to EN62778
Photobiological risk specification	0.2 m
EU RoHS compliant	Yes

Initial Performance (IEC Compliant)	
Luminous flux tolerance	+/-10%
Initial chromaticity	(0.38, 0.38) SDCM≤5
Power consumption tolerance	+/-10%
Over Time Performance (IEC Compliant)	
Control gear failure rate at median useful life	7.5 %
50000 h	
Lumen maintenance at median useful life*	-
35000 h	
Lumen maintenance at median useful life*	80
50000 h	
Lumen maintenance at median useful life*	70
75000 h	
Lumen maintenance at median useful life*	-
100000 h	
Application Conditions	
Performance ambient temperature Tq	25 °C
Maximum dim level	Not applicable
Suitable for random switching	Yes
Product Data	
Full product code	871869979180399
Order product name	RC065B LED34S/840 PSU W60L60
	NOC
Order code	911401885080
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	4
Material number (12NC)	911401885080
Full product name	RC065B LED34S/840 PSU W60L60
	NOC
EAN/UPC - Case	8718699791810



Dimensional drawing

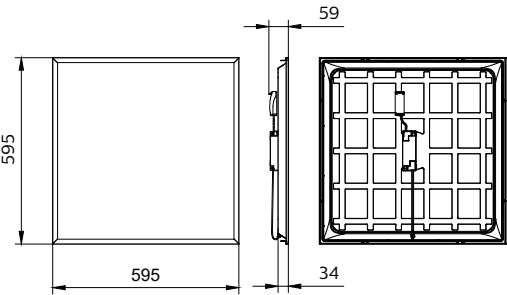

Ledinaire panel

