



# Ledinaire panel

## RC065B LED34S/840 PSU W60L60 OC

- Power supply unit (ON/OFF)

The Philips Ledinaire panel Gen4 (RC065B) range features a selection of popular off-the-shelf LED luminaires that come with Philips high quality levels at a competitive price. Reliable, energy efficient and affordable, this latest generation of 600 x 600 mm Ledinaire LED panel lights are designed for diffuse, comfortable lighting in a wide range of general lighting applications. Our range of Ledinaire panel lighting is also available with accessories for easy installation on different types of ceilings – just what you need

### Product data

General Information	
Light source replaceable	No
Number of gear units	1 unit
Driver included	Yes
Service tag	No
Lighting Technology	LED
Value ladder	Value
Light Technical	
Luminous Flux	3,400 lumen
Saturated Red (R9)	<50
Correlated Color Temperature (Nom)	4000 K
Luminous Efficacy (rated) (Nom)	100 lm/W
Color rendering index (CRI)	>80
Flickering value (PstLM)	1
Stroboscopic effect value (SVM)	0.4
Beam angle of light source	- degree(s)
Light source color	840 neutral white

Optic type	Beam angle 90°
Luminaire light beam spread	90°
Unified glare rating CEN	19
Operating and Electrical	
Input Voltage	220-240 V
Line Frequency	50 or 60 Hz
Input Frequency	50 or 60 Hz
Initial CLO power consumption	- W
Average CLO power consumption	- W
Power Consumption	34 W
Inrush current	16 A
Inrush time	0.18 ms
Power Factor (Fraction)	0.9
Connection	Push-in connector 2-pole
Cable	-
Number of products on MCB of 16 A type B	32


Ledinaire panel

Temperature	
Ambient temperature range	-10 to +25 °C
Controls and Dimming	
Dimmable	No
Driver/power unit/transformer	Power supply unit (ON/OFF)
Control interface	-
Constant light output	No
Mechanical and Housing	
Housing Material	Steel
Reflector material	Acrylate
Optic material	Polystyrene
Optical cover/lens material	Acrylate
Fixation material	-
Housing Color	White
Optical cover/lens finish	Diamond
Overall length	595 mm
Overall width	595 mm
Overall height	35 mm
Dimensions (Height x Width x Depth)	NaN x NaN x NaN mm
Approval and Application	
Ingress protection code	IP20 [Finger-protected]
Mech. impact protection code	IK02 [0.2 J standard]
Sustainability rating	-
Protection class IEC	Safety class II
Glow-wire test	Temperature 650 °C, duration 30 s
Flammability mark	For mounting on normally flammable surfaces
CE mark	Yes
ENEC mark	-
Warranty period	3 years
Photobiological risk	Photobiological risk group 0 @200mm to EN62778
Photobiological risk specification	0.2 m
EU RoHS compliant	Yes

Initial Performance (IEC Compliant)	
Luminous flux tolerance	+/-10%
Init. Corr. Color Temperature	4000 K
Initial chromaticity	(0.38, 0.38) SDCM≤5
Power consumption tolerance	+/-10%
Over Time Performance (IEC Compliant)	
Control gear failure rate at median useful life	7.5 %
50000 h	
Lumen maintenance at median useful life*	-
35000 h	
Lumen maintenance at median useful life*	80
50000 h	
Lumen maintenance at median useful life*	70
75000 h	
Lumen maintenance at median useful life*	-
100000 h	
Application Conditions	
Performance ambient temperature Tq	25 °C
Maximum dim level	Not applicable
Suitable for random switching	Not applicable
Product Data	
Full product code	871869938647499
Order product name	RC065B LED34S/840 PSU W60L60 OC
Order code	911401884580
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	4
Material number (12NC)	911401884580
Full product name	RC065B LED34S/840 PSU W60L60 OC
EAN/UPC - Case	8718699386481



Dimensional drawing

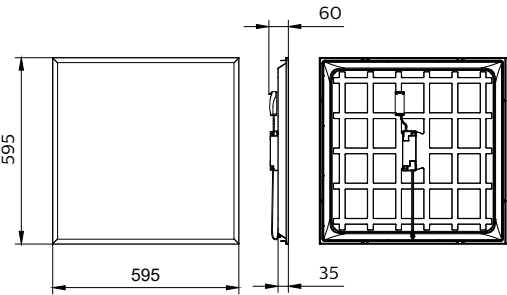

## Ledinaire panel

