


Technique for cable laying and overhead line construction

- Energy cable laying up to 680 kV
- Fibre optic, mini and micro cables
- Cable winding and length measuring
- Overhead line construction up to 110 kV
- Seminars and product instructions



Cable supporting grips, 2 loops, lateral divided, stainless steel

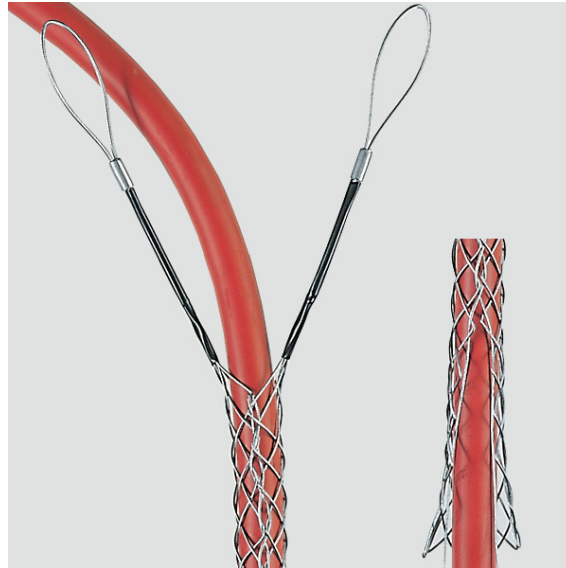

Cable supporting grips with 2 loops. Lateral divided with binding strand. Stainless steel Bowden wire V4A/1.4401 with copper clamp. All Vetter cable grips are handmade therefore of high flexibility. They adapt easy at any difference in cable diameter and are therefore simple to handle. Other versions, e.g. reinforced, different length or in stainless steel are available. For safe and strain relieved cable supporting.

- L1 = the lengths without cables in. L2 = total length included the loops.
- The real length mounted on the cable can be much shorter, depending on the cable diameter.
- Loops without thimbles
- B = internal diameter of the loop
- D = thickness of the loop
- kN = minimum breaking load at equal pull on both loops

Code	Type	C-D	B	D	kN	L1/L2	kg
252321	KME 15/2G	12-15	30	2	6,3	180/400	0,02
252341	KME 19/2G	15-19	30	2	7,8	220/450	0,04
252371	KME 25/2G	19-25	35	2	7,8	275/530	0,05
252411	KME 30/2G	25-30	35	3	12,0	350/630	0,06
252421	KME 40/2G	30-40	50	3	17,4	370/680	0,08
252441	KME 50/2G	40-50	50	3	24,0	490/800	0,12
252451	KME 60/2G	50-60	50	3	24,0	500/840	0,28
252461	KME 70/2G	60-70	50	4	31,8	520/890	0,34