


Technique for cable laying and overhead line construction

- Energy cable laying up to 680 kV
- Fibre optic, mini and micro cables
- Cable winding and length measuring
- Overhead line construction up to 110 kV
- Seminars and product instructions



Cable pulling grips, 1 loop

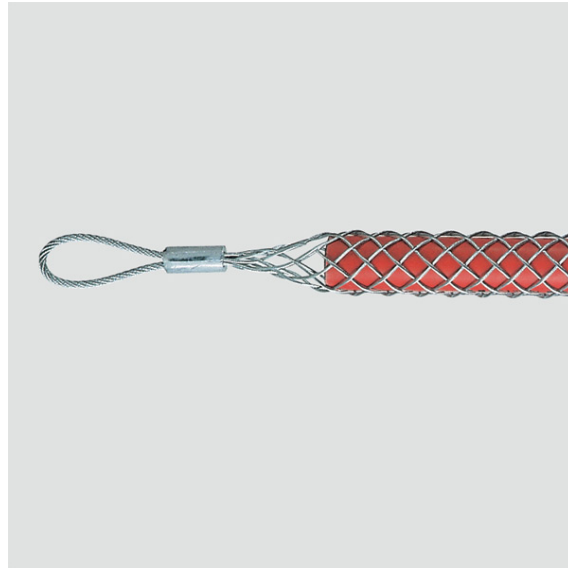

Cable pulling grips with 1 loop, galvanized Bowden wire. All Vetter cable grips are handmade therefore of high flexibility. They adapt easy at any difference in cable diameter and are therefore simple to handle.

- L1 = the lengths without cables in. L2 = total length included the loops.
- The real length mounted on the cable can be much shorter, depending on the cable diameter.
- Loops without thimbles
- B = internal diameter of the loop
- D = thickness of the loop
- kN = minimum breaking load

Code	Type	C-D	B	D	kN	L1/L2	kg
244040	J 6	4-6	10	2	1,8	140/200	0,01
244060	J 9	6-9	15	2	3,3	170/245	0,01
244090	J 12	9-12	15	3	3,9	250/310	0,02
244150	J 19	12-19	20	3	7,8	360/460	0,04
244180	J 25	19-25	20	4	12,0	380/490	0,05
244210	J 31	25-31	20	4	17,4	420/550	0,09