


Technique for cable laying and overhead line construction

- Energy cable laying up to 680 kV
- Fibre optic, mini and micro cables
- Cable winding and length measuring
- Overhead line construction up to 110 kV
- Seminars and product instructions



Cable pulling grips, 1 loop

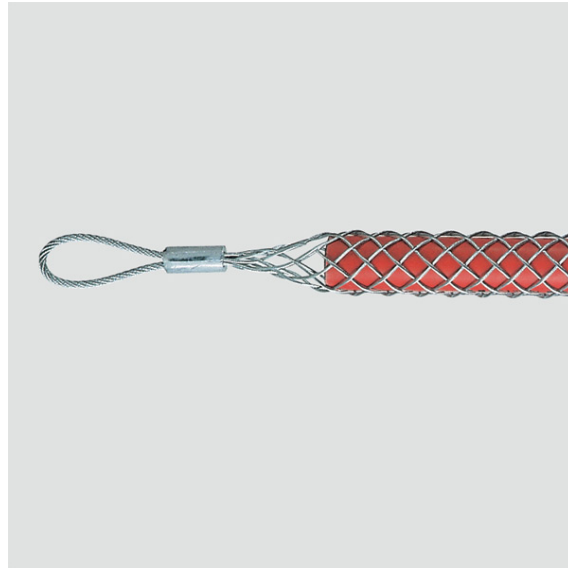

Cable pulling grips with 1 loop, galvanized Bowden wire. All Vetter cable grips are handmade therefore of high flexibility. They adapt easy at any difference in cable diameter and are therefore simple to handle.

- L1 = the lengths without cables in. L2 = total length included the loops.
- The real length mounted on the cable can be much shorter, depending on the cable diameter.
- Loops without thimbles
- B = internal diameter of the loop
- D = thickness of the loop
- kN = minimum breaking load

Code	Type	C-D	B	D	kN	L1/L2	kg
244260	L 9	6-9	15	2	3,3	600/670	0,02
244290	L 12	9-12	15	3	3,9	600/670	0,04
244350	L 19	12-19	20	3	7,8	600/700	0,06
244380	L 25	17-25	20	4	12,0	600/710	0,07
244410	L 31	25-31	20	4	17,4	600/730	0,11
244415	L 40	30-40	20	4	17,4	600/730	0,13
244420	L 50	40-50	20	5	17,4	600/730	0,15