

ERV 150 TC



Short description

Duct-mounted fan for installation in WH 150 wall sleeve, with timer

Application examples

Bathroom, WC, Storage room, Larder, Cellar

Article number 0080.0987

Technical data


Air flow volume	366 m ³ /h
Rotating speed	2.440 1/min
Air direction	Air extraction
Speed controllable	–
Reversing capacity	–
Type of voltage	Alternating current
Rated voltage	230 V
Frequency	50 Hz
Nominal output	38 W
I _{max}	0,27 A
Degree of protection	IP X2
Pole-changeable	–
Mains cable	3 x 1.5 mm ² / 5 x 1.5 mm ²
Installation site	Wall / ceiling
Installation site	Exhaust air room
Type of installation	Duct
Material	Synthetic material
Colour	Traffic white, similar to RAL 9016
Weight	0,8 kg
Weight including packaging	1 kg
Nominal size	151 mm
Suitable for nominal size	151 mm
Width	151 mm
Height	151 mm
Depth	125 mm
Width with packaging	160 mm
Height with packaging	160 mm
Depth with packaging	130 mm
Airstream temperature at I _{Max}	40 °C



ERV 150 TC

Ta ambient temperature	-20 °C ≤ Ta ≤ +40 °C
Sound pressure level	43 dB(A) (Distance 3 m, Free-field conditions)
Packing unit	1 piece
Range	A
GTIN (EAN)	4012799809876

Characteristic curve

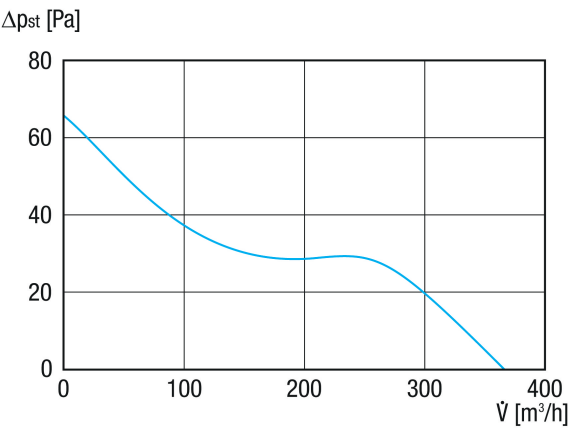

ERV 150 TC

Dimensioned drawing [mm]

