


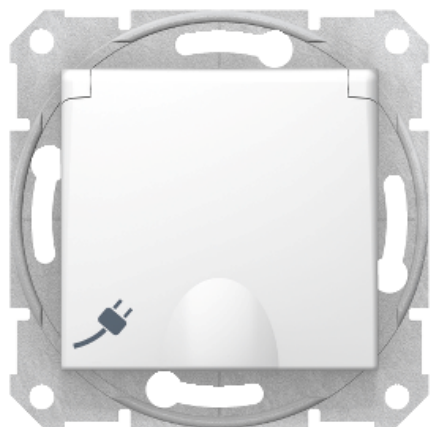

Main

Range name	Sedna
Function	Socket-outlet
Delivery form	Without frame
Outlet poles configuration	2P + E with shutters
Outlet standard description	Side earth
Rated current	16 A at 250 V AC
Socket additional information	Lid
Colour code	RAL 9003

Complementary

Power range	3680 W
Kind of terminals	Screw terminals
Terminal capacity	2 cable(s) 2.5 mm ²
Wire structure	Flexible Rigid
Wire stripping length	13 mm
Material of visible parts	ASA + PC
Surface finish	Glossy
Fixing mode	Screws 52...69 mm By screws and claws, span of claws working range:
Height	71 mm
Width	71 mm
Depth	47.3 mm
Depth of visual part	16 mm
Net weight	0.073818 kg

Environment

Standards	IEC 60884-1
Product certifications	GOST-R
IP degree of protection	IP20

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	76.5 g
Package 1 Height	5 cm
Package 1 width	7 cm
Package 1 Length	7 cm
Unit Type of Package 2	BB1
Number of Units in Package 2	10
Package 2 Weight	837.75 g
Package 2 Height	9.6 cm
Package 2 width	18.6 cm
Package 2 Length	27.6 cm
Unit Type of Package 3	S04
Number of Units in Package 3	120
Package 3 Weight	10.726 kg
Package 3 Height	30 cm
Package 3 width	40 cm
Package 3 Length	60 cm

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
EU RoHS Directive	Compliant EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration Product out of China RoHS scope. Substance declaration for your information
Environmental Disclosure	Product Environmental Profile
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Contractual warranty

Warranty	18 months
----------	-----------