

# LC1D65ABD

TeSys D contactor - 3P(3 NO) - AC-3 -  $\leq 440$  V  
65 A - 24 V DC standard coil



## Main

|                                        |                                                                                                                                                                                                                                                                                                                           |
|----------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Range                                  | TeSys                                                                                                                                                                                                                                                                                                                     |
| Product name                           | TeSys D                                                                                                                                                                                                                                                                                                                   |
| Product or component type              | Contactor                                                                                                                                                                                                                                                                                                                 |
| Device short name                      | LC1D                                                                                                                                                                                                                                                                                                                      |
| Contactor application                  | Motor control<br>Resistive load                                                                                                                                                                                                                                                                                           |
| Utilisation category                   | AC-3<br>AC-4<br>AC-1                                                                                                                                                                                                                                                                                                      |
| Poles description                      | 3P                                                                                                                                                                                                                                                                                                                        |
| Power pole contact composition         | 3 NO                                                                                                                                                                                                                                                                                                                      |
| [Ue] rated operational voltage         | Power circuit: $\leq 690$ V AC 25...400 Hz<br>Power circuit: $\leq 300$ V DC                                                                                                                                                                                                                                              |
| [Ie] rated operational current         | 80 A (at $\leq 60$ °C) at $\leq 440$ V AC AC-1 for power circuit<br>65 A (at $\leq 60$ °C) at $\leq 440$ V AC AC-3 for power circuit                                                                                                                                                                                      |
| Motor power kW                         | 11 kW at 400 V AC 50/60 Hz (AC-4)<br>18.5 kW at 220...230 V AC 50/60 Hz (AC-3)<br>30 kW at 380...400 V AC 50/60 Hz (AC-3)<br>37 kW at 500 V AC 50/60 Hz (AC-3)<br>37 kW at 660...690 V AC 50/60 Hz (AC-3)                                                                                                                 |
| Motor power HP (UL / CSA)              | 40 hp at 460/480 V AC 50/60 Hz for 3 phases motors<br>5 hp at 115 V AC 50/60 Hz for 1 phase motors<br>10 hp at 230/240 V AC 50/60 Hz for 1 phase motors<br>20 hp at 200/208 V AC 50/60 Hz for 3 phases motors<br>20 hp at 230/240 V AC 50/60 Hz for 3 phases motors<br>50 hp at 575/600 V AC 50/60 Hz for 3 phases motors |
| Control circuit type                   | DC standard                                                                                                                                                                                                                                                                                                               |
| [Uc] control circuit voltage           | 24 V DC                                                                                                                                                                                                                                                                                                                   |
| Auxiliary contact composition          | 1 NO + 1 NC                                                                                                                                                                                                                                                                                                               |
| [Uimp] rated impulse withstand voltage | 6 kV conforming to IEC 60947                                                                                                                                                                                                                                                                                              |
| Overvoltage category                   | III                                                                                                                                                                                                                                                                                                                       |

|                                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|----------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| [I <sub>th</sub> ] conventional free air thermal current | 10 A (at 60 °C) for signalling circuit<br>80 A (at 60 °C) for power circuit                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| I <sub>rms</sub> rated making capacity                   | 140 A AC for signalling circuit conforming to IEC 60947-5-1<br>250 A DC for signalling circuit conforming to IEC 60947-5-1<br>1000 A at 440 V for power circuit conforming to IEC 60947                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Rated breaking capacity                                  | 1000 A at 440 V for power circuit conforming to IEC 60947                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| [I <sub>cw</sub> ] rated short-time withstand current    | 520 A 40 °C - 10 s for power circuit<br>900 A 40 °C - 1 s for power circuit<br>110 A 40 °C - 10 min for power circuit<br>260 A 40 °C - 1 min for power circuit<br>100 A - 1 s for signalling circuit<br>120 A - 500 ms for signalling circuit<br>140 A - 100 ms for signalling circuit                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Associated fuse rating                                   | 10 A gG for signalling circuit conforming to IEC 60947-5-1<br>125 A gG at ≤ 690 V coordination type 1 for power circuit<br>125 A gG at ≤ 690 V coordination type 2 for power circuit                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Average impedance                                        | 1.5 mΩ - I <sub>th</sub> 80 A 50 Hz for power circuit                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| [U <sub>i</sub> ] rated insulation voltage               | Power circuit: 600 V CSA certified<br>Power circuit: 600 V UL certified<br>Signalling circuit: 690 V conforming to IEC 60947-1<br>Signalling circuit: 600 V CSA certified<br>Signalling circuit: 600 V UL certified<br>Power circuit: 690 V conforming to IEC 60947-4-1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Electrical durability                                    | 0.5 Mcycles 80 A AC-1 at U <sub>e</sub> ≤ 440 V<br>1.45 Mcycles 65 A AC-3 at U <sub>e</sub> ≤ 440 V                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Power dissipation per pole                               | 9.6 W AC-1<br>6.3 W AC-3                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Front cover                                              | With                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Mounting support                                         | Plate<br>Rail                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Standards                                                | CSA C22.2 No 14<br>EN 60947-4-1<br>EN 60947-5-1<br>IEC 60947-4-1<br>IEC 60947-5-1<br>UL 508                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Product certifications                                   | GOST<br>UL<br>CCC<br>CSA                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Connections - terminals                                  | Control circuit: screw clamp terminals 2 cable(s) 1...2.5 mm <sup>2</sup> flexible with cable end<br>Control circuit: screw clamp terminals 1 cable(s) 1...4 mm <sup>2</sup> flexible without cable end<br>Control circuit: screw clamp terminals 2 cable(s) 1...4 mm <sup>2</sup> flexible without cable end<br>Control circuit: screw clamp terminals 1 cable(s) 1...4 mm <sup>2</sup> flexible with cable end<br>Control circuit: screw clamp terminals 1 cable(s) 1...4 mm <sup>2</sup> solid without cable end<br>Control circuit: screw clamp terminals 2 cable(s) 1...4 mm <sup>2</sup> solid without cable end<br>Power circuit: screw connection 1 cable(s) 1...35 mm <sup>2</sup> flexible without cable end<br>Power circuit: screw connection 2 cable(s) 1...25 mm <sup>2</sup> flexible without cable end<br>Power circuit: screw connection 1 cable(s) 1...35 mm <sup>2</sup> flexible with cable end<br>Power circuit: screw connection 2 cable(s) 1...25 mm <sup>2</sup> flexible with cable end<br>Power circuit: screw connection 1 cable(s) 1...35 mm <sup>2</sup> solid without cable end<br>Power circuit: screw connection 2 cable(s) 1...25 mm <sup>2</sup> solid without cable end |
| Tightening torque                                        | Control circuit: 1.7 N.m - on screw clamp terminals - with screwdriver flat Ø 6 mm<br>Control circuit: 1.7 N.m - on screw clamp terminals - with screwdriver Philips No 2<br>Power circuit: 8 N.m - on EverLink BTR screw connectors - cable 25...35 mm <sup>2</sup> hexagonal screw head 4 mm<br>Power circuit: 5 N.m - on EverLink BTR screw connectors - cable 1...25 mm <sup>2</sup> hexagonal screw head 4 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Operating time                                           | 42.5...57.5 ms closing<br>16...24 ms opening                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Safety reliability level                                 | B10d = 1369863 cycles contactor with nominal load conforming to EN/ISO 13849-1<br>B10d = 2000000 cycles contactor with mechanical load conforming to EN/ISO 13849-1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Mechanical durability                                    | 10 Mcycles                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Maximum operating rate                                   | 3600 cyc/h 60 °C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |

## Complementary

|                                |                                                                                                                                                                      |
|--------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Coil technology                | Built-in bidirectional peak limiting diode suppressor                                                                                                                |
| Control circuit voltage limits | 0.1...0.3 U <sub>c</sub> (-40...70 °C):drop-out DC<br>0.75...1.25 U <sub>c</sub> (-40...60 °C):operational DC<br>1...1.25 U <sub>c</sub> (60...70 °C):operational DC |
| Time constant                  | 34 ms                                                                                                                                                                |
| Inrush power in W              | 19 W (at 20 °C)                                                                                                                                                      |
| Hold-in power consumption in W | 7.4 W at 20 °C                                                                                                                                                       |
| Auxiliary contacts type        | type mechanically linked 1 NO + 1 NC conforming to IEC 60947-5-1<br>type mirror contact 1 NC conforming to IEC 60947-4-1                                             |
| Signalling circuit frequency   | 25...400 Hz                                                                                                                                                          |
| Minimum switching current      | 5 mA for signalling circuit                                                                                                                                          |
| Minimum switching voltage      | 17 V for signalling circuit                                                                                                                                          |
| Non-overlap time               | 1.5 ms on de-energisation between NC and NO contact<br>1.5 ms on energisation between NC and NO contact                                                              |
| Insulation resistance          | > 10 MOhm for signalling circuit                                                                                                                                     |

## Environment

|                                       |                                                                                                                                                                                    |
|---------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| IP degree of protection               | IP20 front face conforming to IEC 60529                                                                                                                                            |
| Protective treatment                  | TH conforming to IEC 60068-2-30                                                                                                                                                    |
| Pollution degree                      | 3                                                                                                                                                                                  |
| Ambient air temperature for operation | -40...60 °C<br>60...70 °C with derating                                                                                                                                            |
| Ambient air temperature for storage   | -60...80 °C                                                                                                                                                                        |
| Operating altitude                    | 0...3000 m                                                                                                                                                                         |
| Fire resistance                       | 850 °C conforming to IEC 60695-2-1                                                                                                                                                 |
| Flame retardance                      | V1 conforming to UL 94                                                                                                                                                             |
| Mechanical robustness                 | Vibrations contactor open: 2 Gn, 5...300 Hz<br>Vibrations contactor closed: 4 Gn, 5...300 Hz<br>Shocks contactor closed: 15 Gn for 11 ms<br>Shocks contactor open: 10 Gn for 11 ms |
| Height                                | 122 mm                                                                                                                                                                             |
| Width                                 | 55 mm                                                                                                                                                                              |
| Depth                                 | 120 mm                                                                                                                                                                             |
| Net weight                            | 0.935 kg                                                                                                                                                                           |

## Packing Units

|                              |           |
|------------------------------|-----------|
| Unit Type of Package 1       | PCE       |
| Number of Units in Package 1 | 1         |
| Package 1 Weight             | 1.004 kg  |
| Package 1 Height             | 6.2 cm    |
| Package 1 width              | 13.4 cm   |
| Package 1 Length             | 15.2 cm   |
| Unit Type of Package 2       | S02       |
| Number of Units in Package 2 | 10        |
| Package 2 Weight             | 10.39 kg  |
| Package 2 Height             | 15 cm     |
| Package 2 width              | 30 cm     |
| Package 2 Length             | 40 cm     |
| Unit Type of Package 3       | P06       |
| Number of Units in Package 3 | 160       |
| Package 3 Weight             | 174.74 kg |
| Package 3 Height             | 77 cm     |

|                  |       |
|------------------|-------|
| Package 3 width  | 80 cm |
| Package 3 Length | 60 cm |


### Offer Sustainability

|                            |                                                                                                                             |
|----------------------------|-----------------------------------------------------------------------------------------------------------------------------|
| Sustainable offer status   | Green Premium product                                                                                                       |
| REACH Regulation           | <a href="#">REACH Declaration</a>                                                                                           |
| REACH free of SVHC         | Yes                                                                                                                         |
| EU RoHS Directive          | Compliant<br><a href="#">EU RoHS Declaration</a>                                                                            |
| Toxic heavy metal free     | Yes                                                                                                                         |
| Mercury free               | Yes                                                                                                                         |
| RoHS exemption information | <a href="#">Yes</a>                                                                                                         |
| China RoHS Regulation      | <a href="#">China RoHS declaration</a><br>Pro-active China RoHS declaration (out of China RoHS legal scope)                 |
| Environmental Disclosure   | <a href="#">Product Environmental Profile</a>                                                                               |
| Circularity Profile        | <a href="#">End of Life Information</a>                                                                                     |
| WEEE                       | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins |
| PVC free                   | Yes                                                                                                                         |

### Contractual warranty

|          |           |
|----------|-----------|
| Warranty | 12 months |
|----------|-----------|

Dimensions

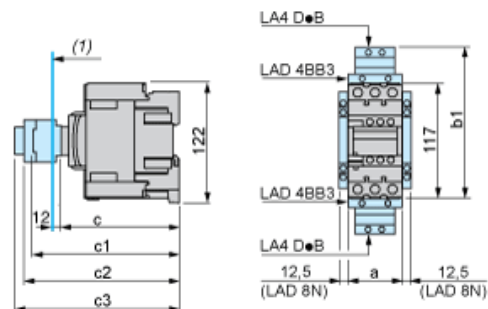

(1) Minimum electrical clearance

| LC1 |                                    | D40A...D65A |
|-----|------------------------------------|-------------|
| a   |                                    | 55          |
| b1  | with LAD 4BB3                      | 136         |
|     | with LA4 DF, DT                    | 157         |
| c   | without cover or add-on blocks     | 118         |
|     | with cover, without add-on blocks  | 120         |
| c1  | with LAD N (1 contact)             | –           |
|     | with LAD N or C (2 or 4 contacts)  | 150         |
| c2  | with LA6 DK10                      | 163         |
| c3  | with LAD T, R, S                   | 171         |
|     | with LAD T, R, S and sealing cover | 175         |

Wiring

