



MASTER LEDtube Mains T5



MAS LEDtube 1500mm HO 26W 865 T5

The new Philips Master LEDtube Mains T5 brings simplicity to your lighting project. You don't need to pay attention to the driver technology anymore. Thanks to a unique design, Philips MASTER LEDtube Mains T5 installs in luminaires operating on mains power connection. So simple to operate! . Perfectly safe, reliable & easy to install Philips MASTER LEDtube Mains T5 is the ideal alternative to standard fluorescent tubes to maximize value over lifetime with high energy saving and lower maintenance costs.

Product data

General Information		Photobiological safety according to EN 62471	
Cap-Base	G5		RG0
Nominal lifetime	50,000 hour(s)	Operating and Electrical	
Switching Cycle	200,000	Line Frequency	50 to 60 Hz
Lighting Technology	LED	Input Frequency	50 to 60 Hz
Flux measurement reference	Sphere	Power Consumption	26 W
Light Technical		Lamp Current (Nom)	125 mA
Color Code	865 [CCT of 6500K]	Starting Time (Nom)	0.5 s
Beam Angle (Nom)	200 degree(s)	Warm-up time to 60% light	0.5 s
Luminous Flux	3,900 lm	Power Factor (Fraction)	0.92
Color Designation	Cool Daylight	Voltage (Nom)	220-240 V
Correlated Color Temperature (Nom)	6500 K	LED alternative to fluorescent lamp power	49 W
Luminous Efficacy (rated) (Nom)	150 lm/W	Inrush current at mains	20
Color Consistency	<6	Max. lamp no. on MCB B type 10A - Mains	31
Color rendering index (CRI)	80	Max. lamp no. on MCB B type 10A – EM ballast without Compensation Capacitor.	-
LLMF At End Of Nominal Lifetime (Nom)	70 %	Max. lamp no. on MCB B type 10A – EM ballast with Compensation Capacitor.	-

MASTER LEDtube Mains T5


Max. lamp no. on MCB B type 16A – Mains	50
Max. lamp no. on MCB B type 16A – EM ballast without Compensation Capacitor.	-
Max. lamp no. on MCB B type 16A – EM ballast with Compensation Capacitor.	-
Ballast Compatibility	Mains
Temperature	
T-Case Maximum (Nom)	65 °C
Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Bulb Finish	Frosted
Bulb Material	Glass
Product Length	1,500 mm
Bulb Shape	T5
Net Weight (Piece)	0.285 kg
Approval and Application	
Energy Efficiency Class	D
Energy Saving Product	Yes
Approval Marks	RoHS compliance

Energy Consumption kWh/1000 h	26 kWh
EPREL Registration Number	1476413
CE mark	Yes
EU RoHS compliant	Yes
Flickering value (PstLM) - Flickering value as per EN 61000-3-3	1
Stroboscopic effect visibility measure (SVM)	0.4
Ambient temperature range	-20 to +45 °C

Product Data

Order product name	MAS LEDtube 1500mm HO 26W 865 T5
Full product name	MAS LEDtube 1500mm HO 26W 865 T5
Full product code	871869681933300
Order code	929001909002
Material Nr. (12NC)	929001909002
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8718696819333
Numerator - Packs per outer box	10
EAN/UPC - Case	8718696819340



Dimensional drawing

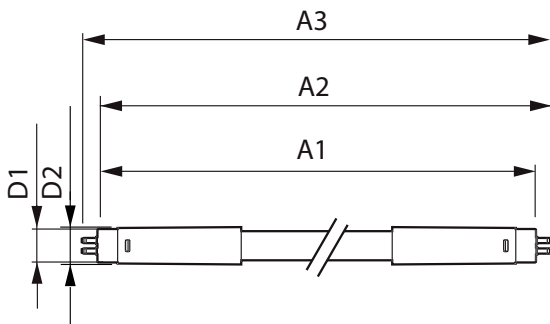

Product	D1	D2	A1	A2	A3
MAS LEDtube 1500mm HO 26W 865 T5	15.5 mm	17.1 mm	1,449 mm	1,456 mm	1,463 mm


MASTER LEDtube Mains T5

Photometric data

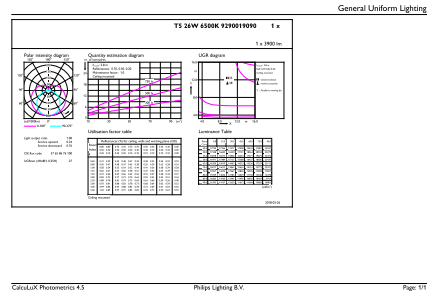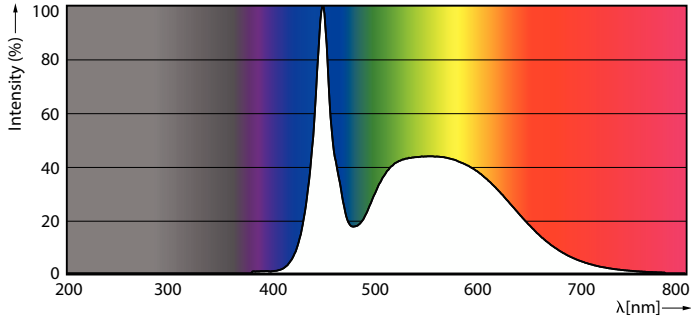


Spectral Power Distribution Colour - MAS LEDtube 1500mm HO 26W 865 T5

General uniform lighting - MAS LEDtube 1500mm HO 26W 865 T5




Light Distribution Diagram - MAS LEDtube 1500mm HO 26W 865 T5

Lifetime

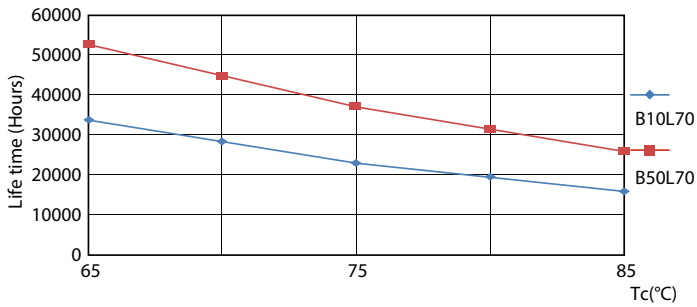

LifetimeVsTc

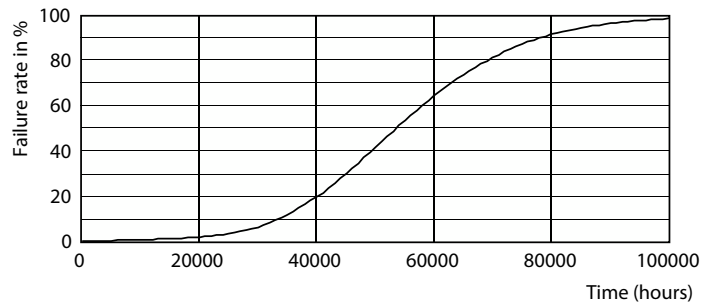

Life Expectancy Diagram

MASTER LEDtube Mains T5

Lifetime



Lumen Maintenance Diagram - MAS LEDtube 1500mm HO 26W 865 T5

Lumen Maintenance Diagram - MAS LEDtube 1500mm HO 26W 865 T5



FailureRate

