

Rittal – The System.

Faster – better – everywhere.

Punched section with mounting flange, 23 x 64 mm for VX, VX IT, VX SE, AX plastic – VX 8617.130

Date : Aug 18, 2021

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE


SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



Punched section with mounting flange, 23 x 64 mm for VX, VX IT, VX SE, AX plastic – VX 8617.130

created: 18.08.2021 on www.rittal.com/com-en

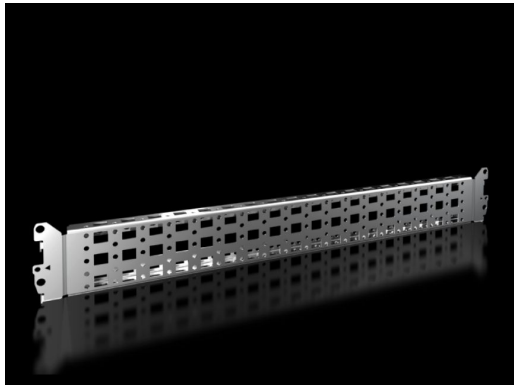

Product description	
Description:	For variable, individual interior installation.
Benefits:	Simply locate into the system punchings and screw-fasten System punchings on all four sides With slots at the top and bottom for cage nuts, for attaching your own components via metric screws
Material:	Sheet steel
Surface finish:	Zinc-plated
Supply includes:	Assembly parts
Product description	
To fit:	Enclosure type: VX Enclosure type: VX IT Enclosure type: VX SE Enclosure type: AX plastic Width/height/depth: 600 mm
Installation options:	In VX, VX IT on the inner mounting mounting level, on the enclosure section VX In the VX SE, on the VX SE enclosure section in conjunction with the VX adaptor rail In AX plastic in the enclosure height/width in conjunction with universal brackets On identical punched sections with mounting flanges In base/plinth system VX in the width and depth, combined with a base/plinth installation bracket
Packs of:	4 pc(s).

Weight/pack:	2.42 kg
Copper weight (kg per piece):	0
EAN:	4028177829138
Customs tariff number:	94039010
ETIM 7.0:	EC002625
ETIM 6.0:	EC002625
eCl@ss 8.0/8.1:	27189234
eCl@ss 6.0/6.1:	23159101
Product description:	VX Punched section, with mounting flange 23 x 64 mm, for inner mounting level, for W/H/D: 600 mm