


product description: Box designated for distribution systems with voltage up to 400 V  
 For installation in insulated building facades 120-300 mm thick  
 Use as a distribution box, for measuring the lightning conductor terminal and other applications as required by the customer  
 Eliminates thermal bridges  
 Box depth is adjustable  
 The kit contains the box, tube, inner and outer insulation, assembly leaflet, V 180 flat cover and stainless bolts  
 When installing on exterior plaster, it is recommended to seal the lid with silicone, or rubber-based window seal (IP 44)  
 Robust design  
 Protected by European industrial design  
 Installation video at [www.kopos.cz](http://www.kopos.cz)

material: PC ABS, halogen-free  
 color: gray  
 self-snuffing: yes, within 30 s  
 temperature resistance: -25 - +60 °C  
 flaming loop test: 850 °C  
 fire class for underlying material: A1-F  
 protection types: IP 30  
 protection types: IP 44 - seal under the lid, plaster roughness up to 2 mm  
 weight: 775 g  
 meets the requirements: EN 60 670-1  
 storage: ČSN 64 0090

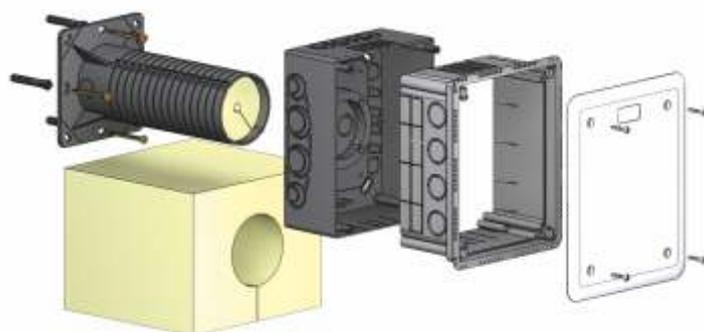

**KUZ-VI\_KB - individual boxes packed in separate cardboard**

accessories: terminal plate S-KSK 2  
 screwless terminal plates TYP015, TYP016, TYP017, TYP018  
 support trunking TS35