## theLeda S10 BK

Item no.: 1020922



# LED spotlights theLeda S

#### Description

- LED spotlight with motion detector
- 1 LED spot with 10 W (equivalent to 140 W Halogen spotlight)
- Spotlight can be swivelled ± 40° horizontally, and adjusted 70° downwards, wall-wash functionality by swivelling 180°
- Suitable for outdoor use
- Automatic lighting control based on presence and brightness
- 180° detection angle at a detection range of 10 m
- Area limit via lens attachment
- Orientation light with configurable dimming level
- Short and extended function via manual control system
- Integrated heat sink in housing color
- Direct-LED for maximum light output
- High-tech matrix-LED module
- Single-handed plug-in installation
- Instant start-up possible via factory preset
- Adjustable lux value and switch-off delay
- Settings can be changed without tools



#### Technical data

	theLeda S10 BK	
Operating voltage	230 V AC	
Frequency	50 – 60 Hz	
Stand-by consumption	~0.4 W	
Colour	Black	
Installation type	Wall installation	
Setting range brightness	5 – 200 lx	
LED output (lighting current)	840 lm	
Colour temperature	4000 K, neutral white	


	theLeda S10 BK
Detection angle	180°
Installation height	1.8 – 2.5 m
Light switch-off delay	2 s-30 min
Ambient temperature	-20°C 45°C
Protection class	I
Type of protection	IP 55

# theLeda S10 BK

Item no.: 1020922





### Connection example

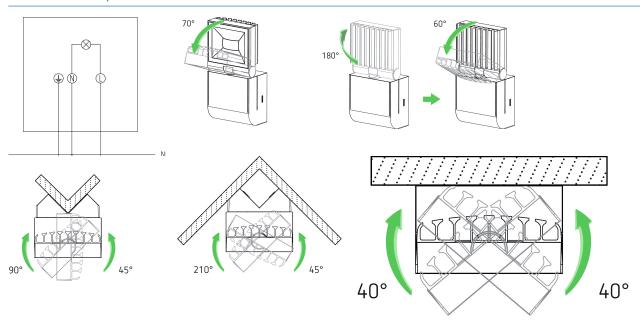

### Detection range for planning applications

Mounting height (A)	Diagonally (t)	Head on to (R)
2.5 m	10 m	3.5 m



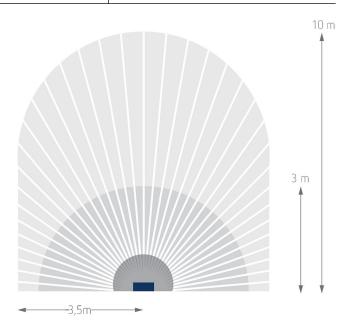



# theLeda S10 BK

Item no.: 1020922



### Scale drawings





#### Accessories

Corner angle 10 BK Item no.: 9070987



Spacer 10 BK Item no.: 9070988

