

# theLeda D SUL AL

Item no.: 1020702



## LED spotlights theLeda D

### Description

- Stylish LED light 14 W
- Light emission at front (spot-light) and at top (up-light)
- High-quality housing made from anodised extruded-aluminium profiles
- Suitable for outdoor use
- High IP 55 protection rating for outdoor installation
- Easy installation with socket
- Wireless connectivity
- Exceptionally efficient thanks to high light output
- Long-lasting LEDs: service life of 50,000 hours
- Product design by ID AID




### Technical data

theLeda D SUL AL	
Operating voltage	230 V AC
Frequency	50 – 60 Hz
Stand-by consumption	~0.5 W
Colour	Aluminium
Installation type	Wall installation
LED output (lighting current)	760 lm   475 lm

theLeda D SUL AL	
Colour temperature	3000 K, warmwhite
Ambient temperature	-25°C ... 45°C
Protection class	II
Type of protection	IP 55

### Connection example

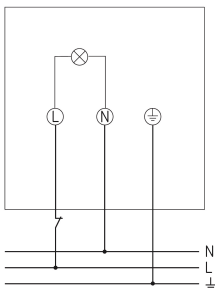

Subject to technical changes and misprints


additional information at: [www.theben.de/product/1020702](http://www.theben.de/product/1020702)

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

# theLeda D SUL AL

Item no.: 1020702

## Scale drawings

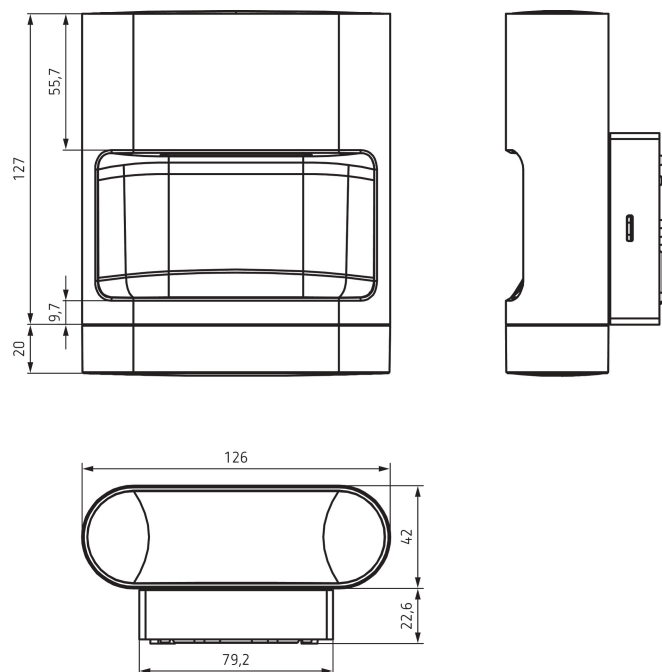

Subject to technical changes and misprints

additional information at: [www.theben.de/product/1020702](http://www.theben.de/product/1020702)

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

20/08/2021

Page 2 of 2