LUXA 103-100 C DE WH

Item no.: 1030016



Presence and motion detectors Indoor detectors

Description

- Motion detector (PIR)
- Automatic lighting control based on presence and brightness
- 1 channel
- Ceiling installation for suspended ceilings
- Mixed light measurement suitable for the control of fluorescent, incandescent and halogen lamps
- Zero-cross switching for relay-saving switching and high lamp loads
- Easy installation via two clamping brackets
- Large clamping area for quick installation
- Single-handed plug-in installation with captive screws
- Instant start-up possible via factory preset
- No unintentional adjustment due to covered up controls
- Adjustable brightness switching value and switch-off delay




Technical data

	LUXA 103-100 C DE WH	
Operating voltage	230 V AC	
Frequency	50 – 60 Hz	
Stand-by consumption	~0.5 W	
Light measurement	Mixed light measurement	
Number of channels	1	
Colour	White	
Switching output	Light	
Installation type	Ceiling installation	
Setting range brightness	10 – 2000 lx	
Detection angle	360°	
Installation height	2 – 3 m	
Light switch-off delay	5 s-30 min	
Incandescent/halogen lamp load	2000 W	

	LUXA 103-100 C DE WH	
Fluorescent lamp load (conventional) parallel-corrected	900 VA 100 µF	
LED lamp < 2 W	35 W	
LED lamp 2-8 W	400 W	
LED lamp > 8 W	400 W	
Lamps	Incandescent/halogen lamps, fluorescent lamps, Energy saving lamps, LEDs	
Detection range	50 m² (ø 8 m 360°)	
Ambient temperature	0°C 45°C	
Protection class		
Type of protection	IP 44	


LUXA 103-100 C DE WH Item no.: 1030016





Detection range for planning applications

Mounting height (A)	Diagonally (t)	Head on to (R)
2.5 m	8 m	4 m

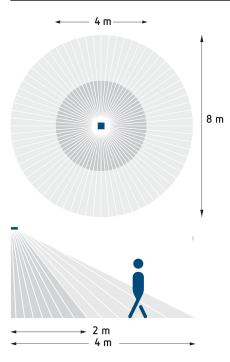

LUXA 103-100 C DE WH

Item no.: 1030016



Scale drawings

