

# theLuxa P300 WH

Item no.: 1010610



## Presence and motion detectors Outdoor detectors

### Description

- Motion detector (PIR)
- Automatic lighting control based on presence and brightness
- 300° detection angle
- For outdoor use
- For installation on walls and ceilings
- For larger, commercial outdoors properties such as offices, public buildings, hotels, schools, car parks and warehouses
- Adjustable brightness switching value and switch-off delay
- Sensitivity can be reduced to limit detection area
- Area limit via lens attachment
- Mixed light measurement suitable for the control of fluorescent, incandescent, halogen lamps and LEDs
- Teach-in of current brightness value possible
- Pulse function
- Test function for checking detection area
- Installation on flush-mounted socket possible (60 mm)
- Single-handed plug-in installation
- Instant start-up possible via factory preset
- Controls are place protected
- Terminal for protective earth conductor
- Spacer and corner angle included in delivery



### Technical data

theLuxa P300 WH	
Operating voltage	230 V AC
Frequency	50 Hz
Stand-by consumption	~0.3 W
Light measurement	Mixed light measurement
Number of channels	1
Colour	White
Switching output	Light
Installation type	Wall and ceiling installation
Setting range brightness	5 – 1000 lx
Switching capacity	10 A at 230 V AC, $\cos \varphi = 1$ , 10 AX at 230 V AC, $\cos \varphi = 0.3$
Detection angle	300°
Installation height	2 – 4 m
Light switch-off delay	1 s-20 min
Incandescent/halogen lamp load	2300 W

theLuxa P300 WH	
Fluorescent lamp load (conventional) parallel-corrected	1300 VA 140 µF
Energy saving lamps	300 W
Inrush current	max. 800 A / 200 µs
LED lamp < 2 W	60 W
LED lamp 2-8 W	600 W
LED lamp > 8 W	600 W
Lamps	Incandescent/halogen lamps, fluorescent lamps, Energy saving lamps, LEDs
Remote controlled	✓
Ambient temperature	-25°C ... 45°C
Protection class	II
Type of protection	IP 55

Subject to technical changes and misprints

additional information at: [www.theben.de/product/1010610](http://www.theben.de/product/1010610)


The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

# theLuxa P300 WH

Item no.: 1010610




## Connection example

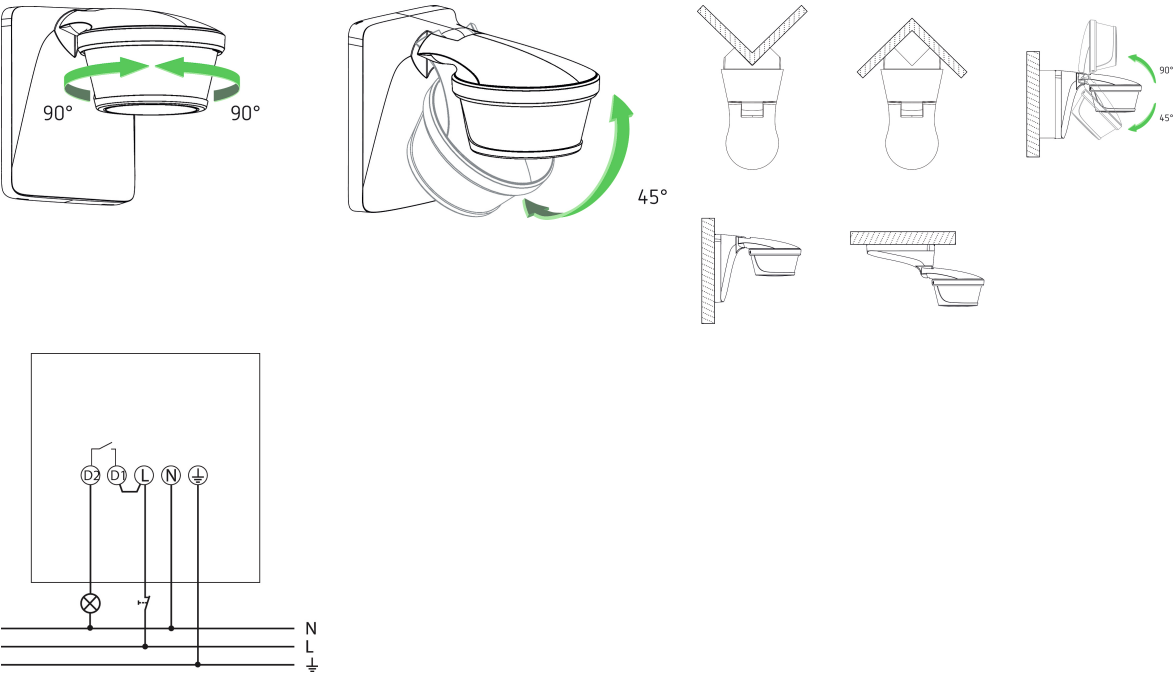

## Detection range for planning applications

Mounting height (A)	Diagonally (t)	Head on to (R)	
2 m	12 m	4 m	
2.5 m	16 m	5 m	
3 m	16 m	5 m	
3.5 m	16 m	5 m	
4 m	12 m	4 m	

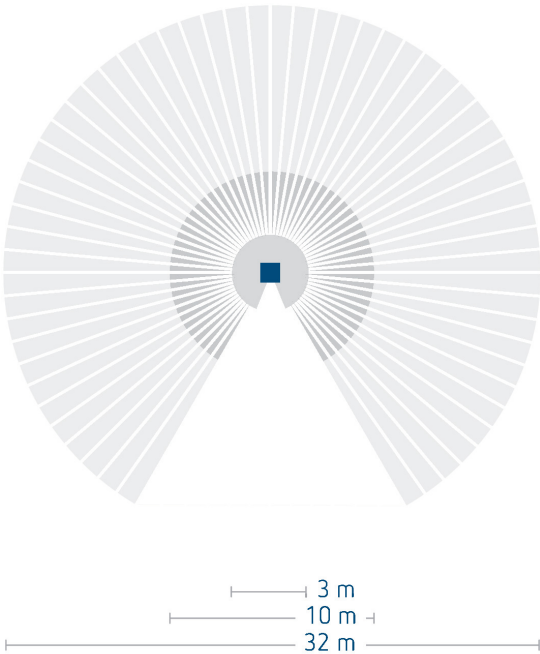


Subject to technical changes and misprints  
 additional information at: [www.theben.de/product/1010610](http://www.theben.de/product/1010610)  
 The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

# theLuxa P300 WH

Item no.: 1010610

**theben**  
energy saving comfort

## Scale drawings

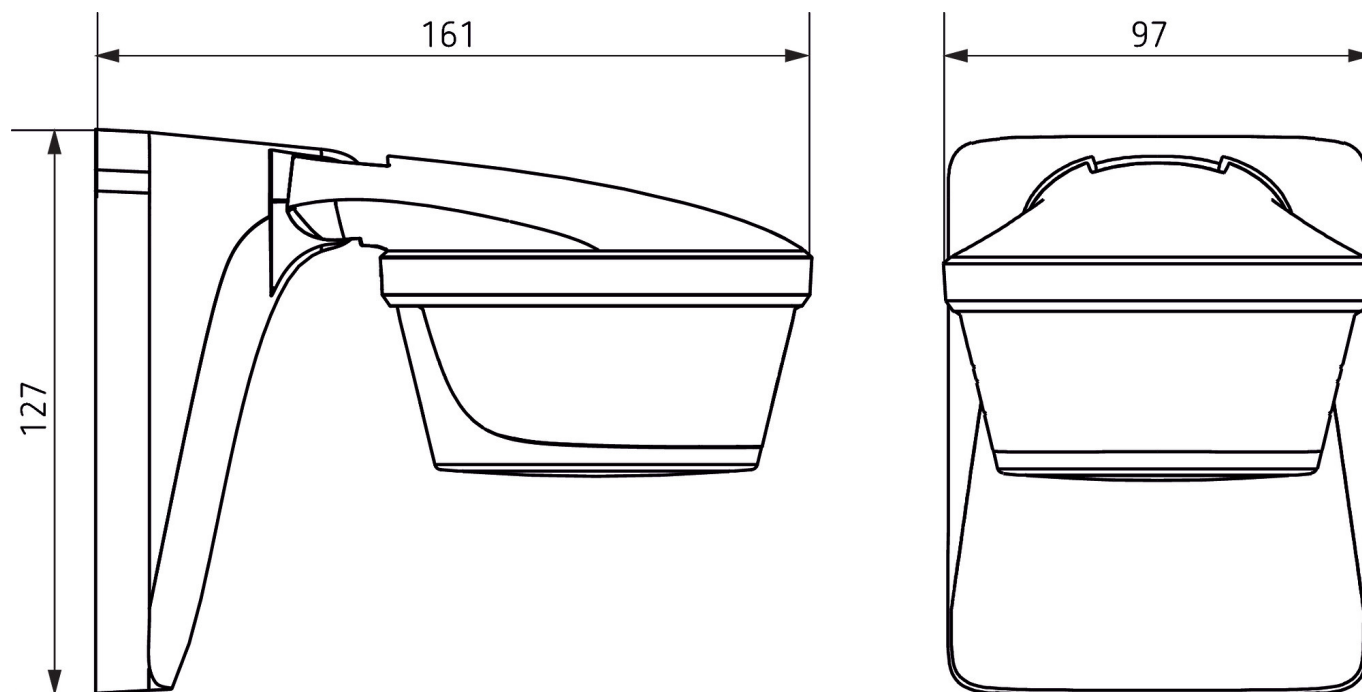

Subject to technical changes and misprints

additional information at: [www.theben.de/product/1010610](http://www.theben.de/product/1010610)

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

02/04/2021

Page 3 of 3