

theLeda D S AL

Item no.: 1020901



LED spotlights theLeda D

Description

- Stylish LED light 8.5 W with motion detector (PIR)
- Light emission at front (spot-light)
- High-quality housing made from anodised extruded-aluminium profiles
- Suitable for outdoor use
- Automatic lighting control based on presence and brightness
- 180° detection angle at 10 m range
- Teach-in, test, twilight switch, dimmable orientation light and self-calculating night interruption functions can be adjusted via theSenda B and the theSenda Plug app
- High IP 55 protection rating for outdoor installation
- Easy installation with socket
- Wireless connectivity
- Exceptionally efficient thanks to high light output
- Long-lasting LEDs: service life of 50,000 hours
- Manual control via an interrupter switch (PERM ON 6 h)
- Product design by ID AID




Technical data

theLeda D S AL	
Operating voltage	230 V AC
Frequency	50 – 60 Hz
Stand-by consumption	~0.5 W
Colour	Aluminium
Installation type	Wall installation
Setting range brightness	2 – 800 lx
LED output (lighting current)	760 lm
Colour temperature	3000 K, warmwhite

theLeda D S AL	
Detection angle	180°
Light switch-off delay	10 s-20 min
Remote controlled	✓
Ambient temperature	-25°C ... 45°C
Protection class	II
Type of protection	IP 55

Connection example



Subject to technical changes and misprints

additional information at: www.theben.de/product/1020901


The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

20/08/2021


Page 1 of 3

Detection range for planning applications

Mounting height (A)	Diagonally (t)	Head on to (R)
2.2 m	10 m	4 m

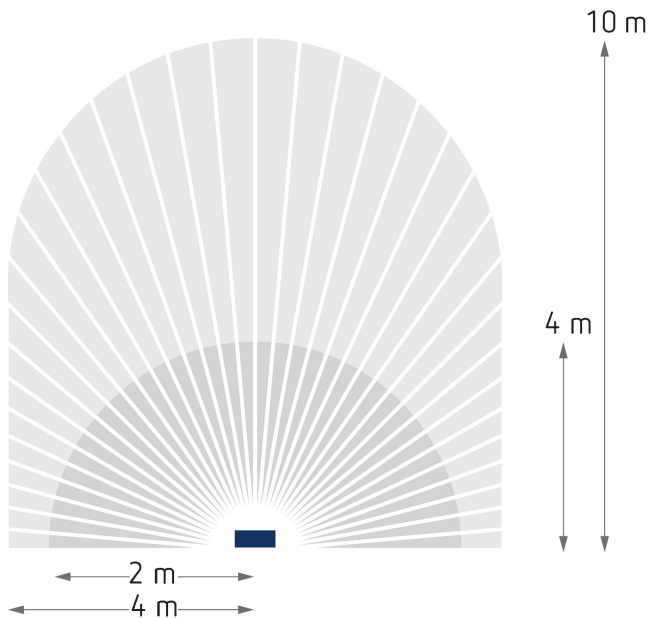

Scale drawings

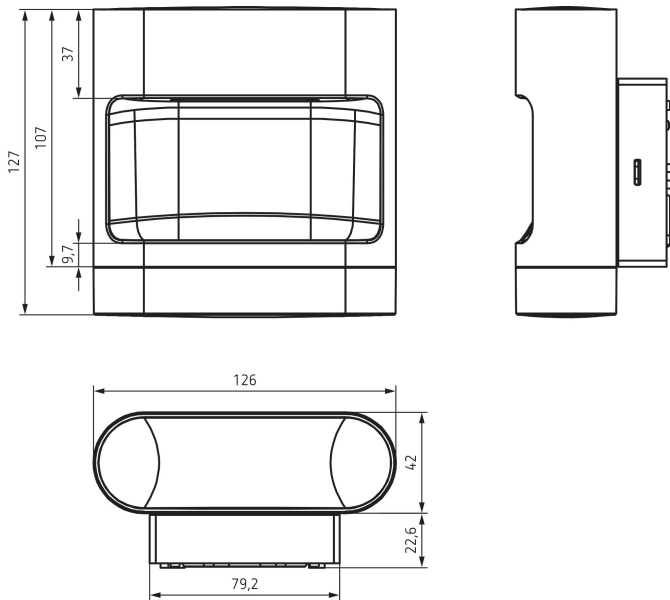

Item no.: 1020901



theSenda P

Item no.: 9070910



theSenda S

Item no.: 9070911



theSenda B

Item no.: 9070985



additional information at: www.theben.de/product/1020901

20/08/2021
Page 3 of 3