

BEGA**22 613**

Wall luminaire



Project · Reference number

Date

Product data sheet

Application

Shielded wall luminaire with high protection class for a variety of lighting tasks. A luminaire made of die cast aluminium and impact resistant crystal glass with light diffusing structures.

Product description

Luminaire made of aluminium alloy and stainless steel
 BEGA Unidure® coating technology
 Crystal glass with optical structure
 2 mounting holes \varnothing 5.3 mm
 Distance apart 90 mm
 2 cable entries for through-wiring of mains supply cable \varnothing 7-10.5 mm
 Connection terminal 2.5²
 Earth conductor connection
 Lampholder E 27
 Safety class I
 Protection class IP 65
 Dust-tight and protection against water jets
 Impact strength IK07
 Protection against mechanical impacts < 2 joule
 – Safety mark
 – Conformity mark
 Weight: 2.5 kg

Lamps

Luminaire with screw base E 27
 Lamp output max. 2 × 60 W
 This product contains light sources of energy efficiency class E

Supplied lamp


2 × BEGA LED lamp **13584**
 LED Retrofit 7 W · 1610 lm · 3000 K

Luminaire efficiency: 27%

Additional BEGA LED lamps are available for this luminaire:

13586 LED 7 W · 805 lm · 3000 K
 dimmable

Detailed technical and lighting data for the lamps can be found in the data sheets on our website.

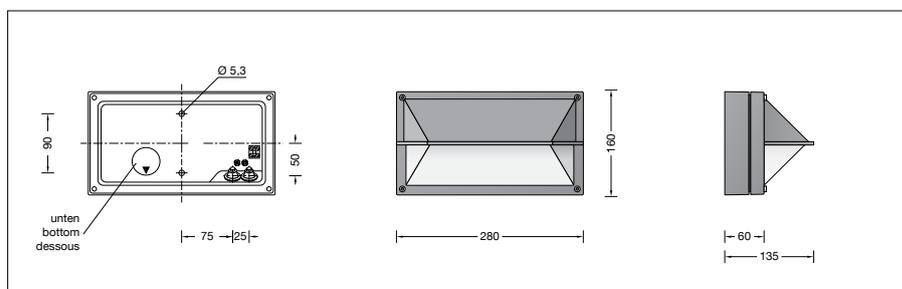

Lighting technology

Luminaire data for the DIALux lighting design program for outdoor lighting, street lighting and indoor lighting, as well as luminaire data in EULUMDAT and IES format are available on the BEGA website at www.bega.com.

Ratio of luminous flux

Luminous flux upper half-space	14,7 %
Luminous flux lower half-space	85,3 %

BUG rating according to IES TM-15-07:
 0-2-1

CEN Flux Code according to EN 13032-2:
 33-60-83-85-27-2-10-38-15

Article No. 22613

Colour graphite or silver
 graphite – article number
 silver – article number + **A**

Light distribution

