

**BEGA****89 759.1**

Ceiling and wall luminaire for indoor use



Project · Reference number

Date

## Product data sheet

### Application

Ceiling and wall luminaire · indoor luminaire made of hand-blown opal glass, satin matt and metal housing, for all lighting tasks. They are ideal for places where a soft and uniform lighting distribution is required. Luminaire with a high protection class.

### Product description

Metal housing, finish Colour white  
Hand-blown opal glass, satin matt, with sliding-bolt closure  
2 mounting holes  $\varnothing$  5.5 mm  
Distance apart 240 mm  
2 cable entries for through-wiring for mains cable up to  $\varnothing$  10.5 mm max.  $3 \times 1.5^{\square}$   
Connection terminal  $2.5^{\square}$   
Earth conductor connection  
Lampholder E 27  
Safety class I  
Protection class IP 44  
Protected against granular foreign bodies  $\geq 1$  mm and splash water  
Impact strength IK07  
Protection against mechanical impacts  $< 2$  joule  
 – Safety mark  
 – Conformity mark  
Weight: 3.4 kg

### Lighting technology

Luminaire data for the DIALux lighting design program for outdoor lighting, street lighting and indoor lighting, as well as luminaire data in EULUMDAT and IES format are available on the BEGA website at [www.bega.com](http://www.bega.com).

### Lamp


Luminaire with screw base E 27  
Lamp output max. 75 W  
This product contains light sources of energy efficiency class E

Supplied lamp  
BEGA LED lamp **13548**  
LED Retrofit 7 W · 805 lm · 2700 K  
dimnable

Supplied lamp  
BEGA LED lamp **13586**  
LED Retrofit 7 W · 805 lm · 3000 K  
dimnable

Luminaire efficiency: 54%

Detailed technical and lighting data for the lamps can be found in the data sheets on our website.

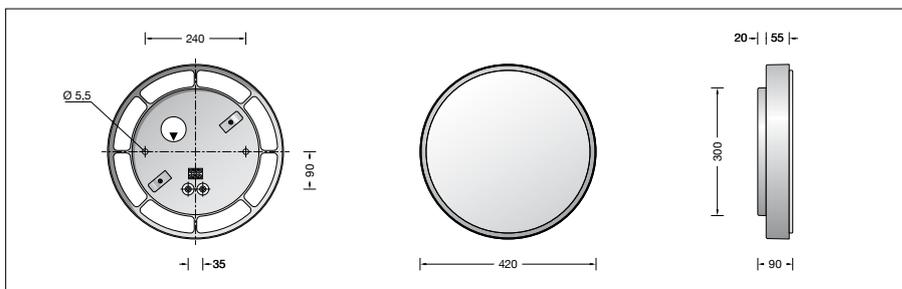

### Article No. 89 759.1

Colour temperature of the supplied LED lamp  
optionally 2700 K or 3000 K  
2700 K – article number + **K27**  
3000 K – article number + **K3**

### Finish options

- White
- White aluminium

Code number **.1**

Code number **.2**