

BEGA**89 759.2**

Ceiling and wall luminaire for indoor use



Project · Reference number

Date

Product data sheet

Application

Ceiling and wall luminaire · indoor luminaire made of hand-blown opal glass, satin matt and metal housing, for all lighting tasks. They are ideal for places where a soft and uniform lighting distribution is required. Luminaire with a high protection class.

Product description

Metal housing, finish Colour white aluminium
Hand-blown opal glass, satin matt, with sliding-bolt closure
2 mounting holes \varnothing 5.5 mm
Distance apart 240 mm
2 cable entries for through-wiring for mains cable up to \varnothing 10.5 mm max. $3 \times 1.5^{\square}$
Connection terminal 2.5^{\square}
Earth conductor connection
Lampholder E 27
Safety class I
Protection class IP 44
Protected against granular foreign bodies ≥ 1 mm and splash water
Impact strength IK07
Protection against mechanical impacts < 2 joule
 – Safety mark
CE – Conformity mark
Weight: 4.0 kg

Lighting technology

Luminaire data for the DIALux lighting design program for outdoor lighting, street lighting and indoor lighting, as well as luminaire data in EULUMDAT and IES format are available on the BEGA website at www.bega.com.

Lamp

Luminaire with screw base E 27
Lamp output max. 75 W
This product contains light sources of energy efficiency class E

Supplied lamp


BEGA LED lamp **13548**
LED Retrofit 7 W · 805 lm · 2700 K
dimnable

Supplied lamp

BEGA LED lamp **13586**
LED Retrofit 7 W · 805 lm · 3000 K
dimnable

Luminaire efficiency: 54%

Detailed technical and lighting data for the lamps can be found in the data sheets on our website.

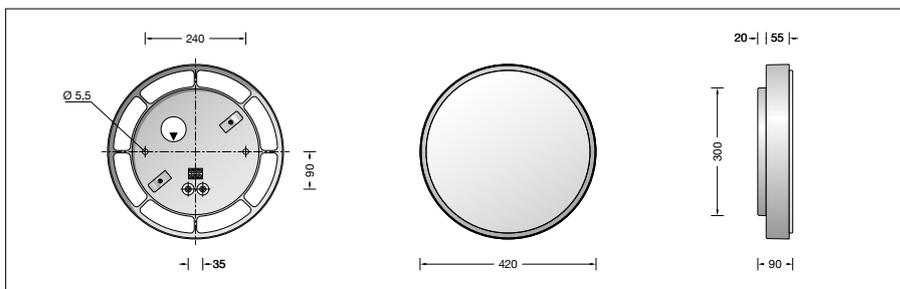

Article No. 89 759.2

Colour temperature of the supplied LED lamp
optionally 2700 K or 3000 K
2700 K – article number + **K27**
3000 K – article number + **K3**

Finish options

- White
- White aluminium

Code number **.1**

Code number **.2**