

BEGA**23 322**

Ceiling and wall luminaire for indoor use



Project · Reference number

Date

Product data sheet

Application

Ceiling and wall luminaire · indoor luminaire made of hand-blown opal glass and metal housing, for all lighting tasks. They are ideal for places where a soft and uniform lighting distribution is required.

Product description

Metal housing, finish Colour white
 Hand-blown opal glass, with sliding-bolt closure
 2 mounting holes \varnothing 5.5 mm
 Distance apart 150 mm
 1 cable entry for through-wiring for mains cable
 Connecting terminal 2.5[□] with plug connection
 Earth conductor connection
 LED power supply unit
 220-240 V \sim 0/50-60 Hz
 DC 176-280 V
 BEGA Thermal Switch®
 Temporary thermal shutdown to protect temperature-sensitive components
 Safety class I
 Impact strength IK05
 Protection against mechanical impacts < 0.7 joule
 - Safety mark
CE - Conformity mark
 Weight: 4.8 kg
 This product contains light sources of energy efficiency class(es) D

Lamp

Module connected wattage	17 W
Luminaire connected wattage	19.6 W
Rated temperature	$t_a = 25$ °C
Ambient temperature	$t_{a \max} = 45$ °C

23 322 K3


Module designation	LED-0530/930
Colour temperature	3000 K
Colour rendering index	CRI > 90
Module luminous flux	2605 lm
Luminaire luminous flux	1972 lm
Luminaire luminous efficiency	100,6 lm/W

Service life · Ambient temperature

Rated temperature $t_a = 25$ °C	
LED psu:	> 50,000 h
LED module:	> 200,000 h (L 80 B 50)
	50,000 h (L 90 B 50)

Ambient temperature max. $t_a = 45$ °C (100 %)

LED psu:	50,000 h
LED module:	190,000 h (L 80 B 50)
	50,000 h (L 90 B 50)

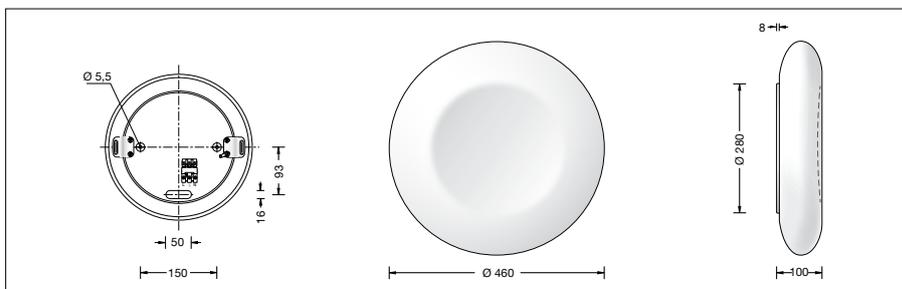

Lighting technology

Luminaire data for the DIALux lighting design program for outdoor lighting, street lighting and indoor lighting, as well as luminaire data in EULUMDAT and IES format are available on the BEGA website at www.bega.com.

Inrush current

Inrush current: 5 A / 50 μ s
 Maximum number of luminaires of this type per miniature circuit breaker:

B 10 A:	31 luminaires
B 16 A:	50 luminaires
C 10 A:	52 luminaires
C 16 A:	85 luminaires