

Project · Reference number

Date

**Product data sheet****Application**

Ceiling and wall luminaire · indoor luminaire made of hand-blown opal glass, satin matt and metal housing, for all lighting tasks. They are ideal for places where a soft and uniform lighting distribution is required. Luminaire with a high protection class.

**Product description**

Aluminium alloy housing, finish Colour white  
Hand-blown opal glass, satin matt  
2 mounting holes ø 6 mm  
Distance apart 110 mm  
2 cable entries for through-wiring for mains cable up to ø 10.5 mm max. 3 x 1.5<sup>2</sup>  
Lampholder terminals 2.5<sup>2</sup>  
Earth conductor terminal  
Lampholder E 27  
Safety class I  
Protection class IP 44  
Protected against granular foreign bodies  
≥ 1 mm and splash water  
Impact strength IK02  
Protection against mechanical impacts < 0.2 joule  
 – Safety mark  
 – Conformity mark  
Weight: 1.6 kg

**Lamp**

Luminaire with screw base E 27  
Lamp output max. 75 W  
This product contains light sources of energy efficiency class E

## Supplied lamp

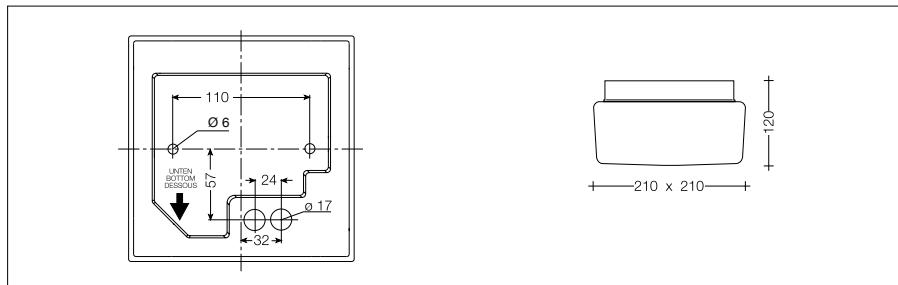
BEGA LED lamp **13548**LED Retrofit 7 W · 805 lm · 2700 K  
dimmable

## Supplied lamp

BEGA LED lamp **13586**LED Retrofit 7 W · 805 lm · 3000 K  
dimmable

Luminaire efficiency: 69%

Detailed technical and lighting data for the lamps can be found in the data sheets on our website.

**Lighting technology**

Luminaire data for the DIALux lighting design program for outdoor lighting, street lighting and indoor lighting, as well as luminaire data in EULUMDAT and IES format are available on the BEGA website at [www.bega.com](http://www.bega.com).

**Article No. 89 017**

Colour temperature of the supplied LED lamp optionally 2700 K or 3000 K  
2700 K – article number + **K27**  
3000 K – article number + **K3**