theLeda D U AL

Item no.: 1020903

LED spotlights
theLeda D

Description

- Stylish LED light 8.5 W with motion detector (PIR)
- Light emission at top (up-light)
- High-quality housing made from anodised extruded-aluminium profiles
- Suitable for outdoor use
- Automatic lighting control based on presence and brightness
- 180° detection angle at 10 m range
- Teach-in, test, twilight switch, dimmable orientation light and self-calculating night interruption functions can be adjusted via theSenda B and the theSenda Plug app
- High IP 55 protection rating for outdoor installation
- Easy installation with socket
- Wireless connectivity
- Exceptionally efficient thanks to high light output
- Long-lasting LEDs: service life of 50,000 hours
- Manual control via an interrupter switch (PERM ON 6 h)
- Product design by ID AID

Technical data

	theLeda D U AL
Operating voltage	230 V AC
Frequency	50 – 60 Hz
Stand-by consumption	~0.5 W
Colour	Aluminium
Installation type	Wall installation
Setting range brightness	2 – 800 lx
LED output (lighting current)	760 lm
Colour temperature	3000 K, warmwhite

	theLeda D U AL
Detection angle	180°
Light switch-off delay	10 s-20 min
Remote controlled	√
Ambient temperature	-25°C ... 45°C
Protection class	II
Type of protection	IP 55

theLeda D U AL

Item no.: 1020903

Connection example



Detection range for planning applications

Mounting height (A)	Diagonally (t)	Head on to (R)
2.2 m	10 m	4 m

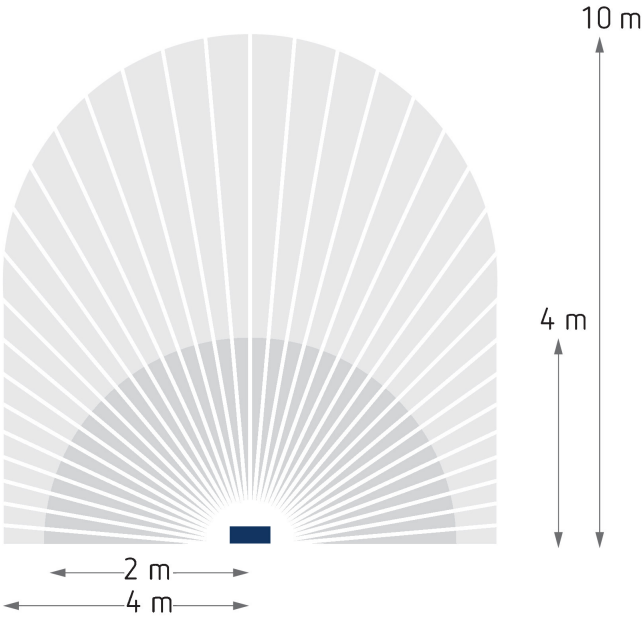

theLeda D U AL

Item no.: 1020903

Scale drawings

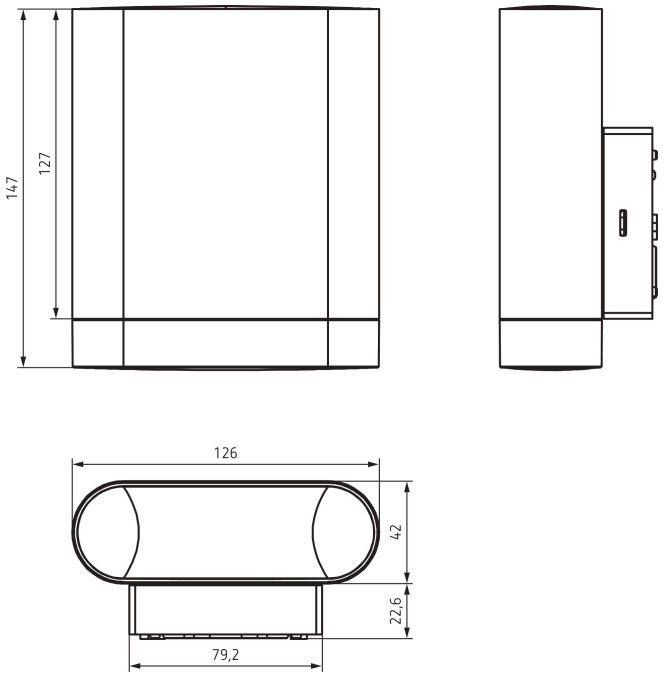

Accessories

theSenda P
Item no.: 9070910

theSenda S
Item no.: 9070911

theSenda B
Item no.: 9070985