


Product data sheet

Specifications

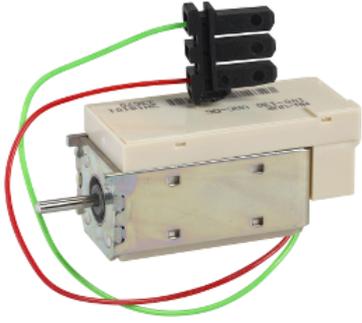

XF closing voltage release, MasterPact NW drawout, 200/250V AC/DC

48484

Main

Device short name	XF
Product or component type	Voltage release
Device application	Control
Range compatibility	Masterpact NW
[Uc] control circuit voltage	200...250 V AC 50/60 Hz 200...250 V DC

Complementary

Threshold tripping voltage	0.85...1.1 Un
Supply holding power	4.5 VA
Mounting mode	Drawout
Response time	70 ms at 800 A (Masterpact NW) 70 ms at 1000 A (Masterpact NW) 70 ms at 1250 A (Masterpact NW) 70 ms at 1600 A (Masterpact NW) 70 ms at 2000 A (Masterpact NW) 70 ms at 2500 A (Masterpact NW) 70 ms at 3200 A (Masterpact NW) 70 ms at 4000 A (Masterpact NW) 80 ms at 4000 A (Masterpact NW) 80 ms at 5000 A (Masterpact NW) 80 ms at 6300 A (Masterpact NW)

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	179 g
Package 1 Height	5 cm
Package 1 width	7.5 cm
Package 1 Length	11 cm

Offer Sustainability

REACH Regulation	REACH Declaration
EU RoHS Directive	Compliant EU RoHS Declaration
Mercury free	Yes

RoHS exemption information	Yes
-----------------------------------	---------------------

China RoHS Regulation	China RoHS declaration Product out of China RoHS scope. Substance declaration for your information
------------------------------	---

Contractual warranty

Warranty	18 months
-----------------	-----------
