


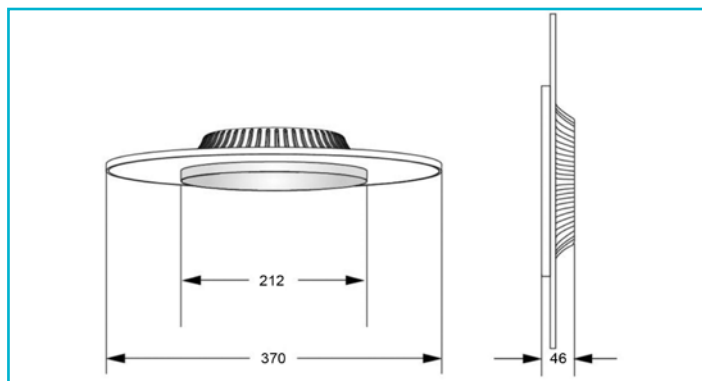

Whilst flat surfaces and covers are the go-to for most surface-mounted ceiling lights, the ZANIAH places special emphasis on its 360° lamp [either a 12 W, 18 W or 24 W variant]. Replaceable covers allow the visual appearance of ZANIAH to be changed even after installation. The covers are available in eight colour variants, allowing plenty of scope for customisation.

Special features

- Can be customised using coloured covers
- 360° light emission angle
- Can be used as a wall or ceiling light

Housing Material	Aluminium	Life Time L70 / B50	50000 h
Housing Color	Blue	Switching Cycles	25000
Material of Lens	Plastic	Power Consumption	18 kWh/1000h
Protection Class	Protection class II/protective insulation	EEI	G
Rated Input	18 W		
Rated Power Consumption Standby	0.5 W		
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz		
Power Supply Unit incl.	Yes		
Connection Type	Clamp		
Dimmable	Yes		
Control	Leading-edge dimmer, Trailing-edge dimmer		
Motion Detector	No		
Light Source	LED, Light source not changeable		
Color Temperature	3000 K		
Colour Consistency	6 SDCM		
Colour Rendering Index (Ra)	80		
Rated Luminous Flux	2020 lm		
Rated Angle of Reflection	120 Degree		
Distribution Characteristic 120°	NDLS		
Light Exit Surfaces	2		
Light characteristics	Direct, Indirect		
Light direction	Below, Rear		
Height	46 mm		
Diameter	370 mm		
Working Temperature	-20 to 45 °C		
Storage Temperature	-10 to 60 °C		
IP Protection Class	IP 20		
IK Protection Class	IK05		