


Art. no. 731025

Surface-mounted wall light Cubodo 2 single, 8.5 W, 3,000 K, light grey

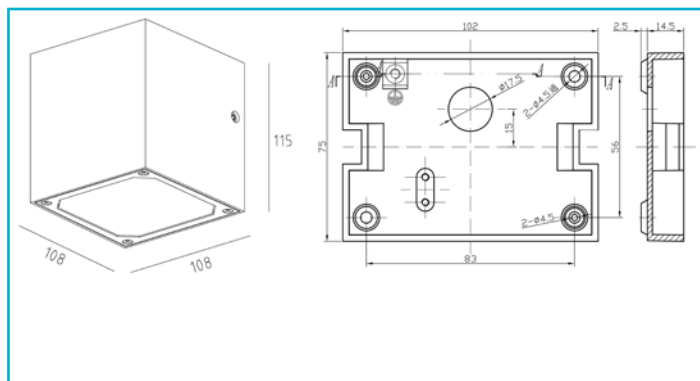

Housing Material	Aluminium
Housing Color	Light grey
Material of Lens	Glass
Functions	Nightsaver
Protection Class	Protection class I/protective grounding
Rated Input	8.5 W
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz
Power Supply Unit incl.	Yes
Dimmable	No
Motion Detector	No

IK Protection Class	IK04
Life Time L70 / B50	30000 h
Switching Cycles	100000
Power Consumption EEI	9 kWh/1000h G

Light Source	LED, Light source not changeable
Color Temperature	3000 K
Colour Consistency	6 SDCM
Colour consistency light source CRI (Ra)	80
Rated Luminous Flux	600 lm
Rated Angle of Reflection	19 Degree
Distribution Characteristic 120°	DLS

Light Exit Surfaces	1
Light characteristics	Direct
Light direction	Below

Length	108 mm
Width	108 mm
Height	115 mm
Base length	108 mm
Base width	108 mm

Working Temperature	-20 to 40 °C
Storage Temperature	-10 to 60 °C
IP Protection Class	IP 54

