



MASTER Value LEDtube T8

MAS LEDtube VLE 600mm HO 8W 840 T8

A high-performance LED solution, the professional MASTER Value LED tube is ideal for replacing T8 fluorescent lamps using EM ballast or installing directly on the mains. This product provides an optimal combination of value and performance – for use in all general lighting, office, industry, retail, and hospitality applications. The unique design of this LED T8 tube light offers wide compatibility, safety and fast installation, as well as instant energy savings.

Product data


General Information		Operating and Electrical	
Cap-Base	G13 [Medium Bi-Pin Fluorescent]	Line Frequency	50 to 60 Hz
Nominal lifetime	60,000 hour(s)	Input Frequency	50 to 60 Hz
Switching Cycle	200,000	Power Consumption	8 W
Lighting Technology	LED	Starting Time (Nom)	0.5 s
Flux measurement reference	Sphere	Warm-up time to 60% light	0.5 s
Light Technical		Power Factor (Fraction)	0.9
Color Code	840 [CCT of 4000K]	Voltage (Nom)	220-240 V
Beam Angle (Nom)	190 degree(s)	Temperature	
Luminous Flux	1,050 lumen	Ambient temperature range	-20 °C to 45 °C
Color Designation	Cool White (CW)	T-Case Maximum (Nom)	55 °C
Correlated Color Temperature (Nom)	4000 K	Controls and Dimming	
Luminous Efficacy (rated) (Nom)	131 lm/W	Dimmable	No
Color Consistency	<6	Mechanical and Housing	
Color rendering index (CRI)	80	Bulb Finish	Frosted
LLMF At End Of Nominal Lifetime (Nom)	70 %	Bulb Material	Glass

MASTER Value LEDtube T8

Product Length	600 mm
Bulb Shape	Tube, double-ended
Approval and Application	
Energy Saving Product	Yes
Approval Marks	RoHS compliance TUV CE marking KEMA Keur certificate
Energy Consumption kWh/1000 h	8 kWh
EPREL Registration Number	1,095,863
CE mark	Yes
EU RoHS compliant	Yes



Product Data	
Full product code	871869964681300
Order product name	MAS LEDtube VLE 600mm HO 8W 840 T8
Order code	929002021202
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material number (12NC)	929002021202
Full product name	MAS LEDtube VLE 600mm HO 8W 840 T8
EAN/UPC - Case	8718699646820

Dimensional drawing

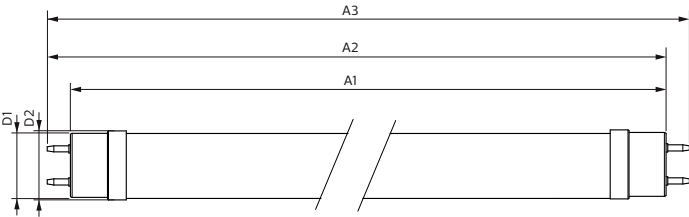

Product	D1	D2	A1	A2	A3
MAS LEDtube VLE 600mm HO 8W 840 T8	25.8 mm	28 mm	588.6 mm	595.7 mm	602.8 mm


Photometric data



Light Distribution Diagram - MAS LEDtube VLE 600mm HO 8W 840 T8


MASTER Value LEDtube T8

Photometric data

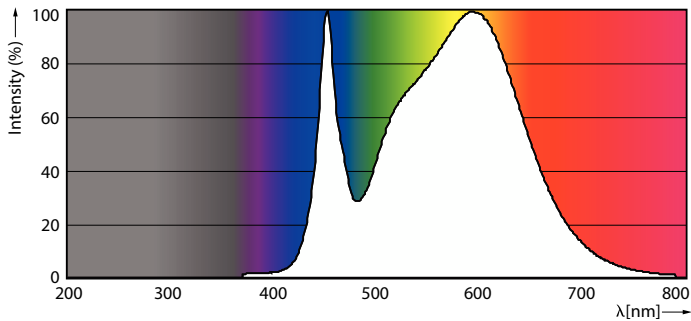


Spectral Power Distribution Colour - MAS LEDtube VLE 600mm HO 8W 840 T8


Lifetime

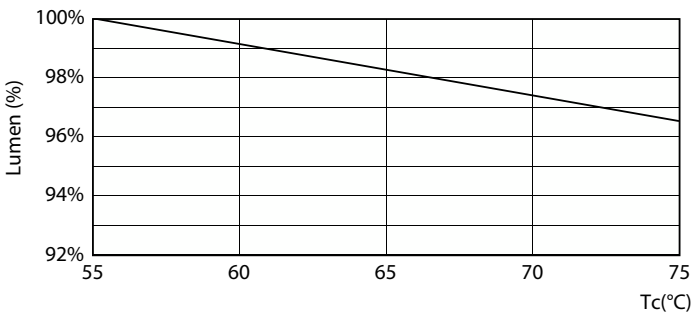


Lumen Maintenance Diagram - MAS LEDtube VLE 600mm HO 8W 840 T8

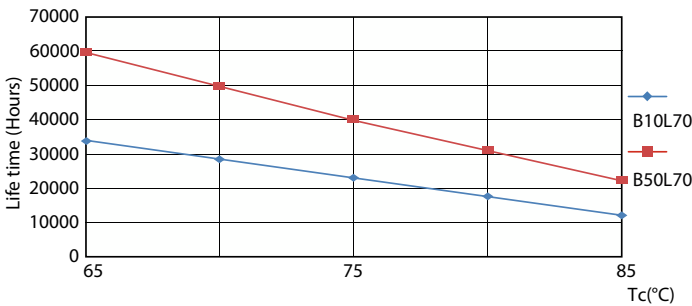

Life Expectancy Diagram - MAS LEDtube VLE 600mm HO 8W 840 T8

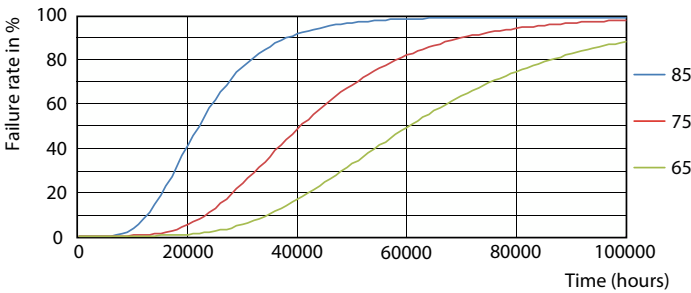


Life Expectancy Diagram - MAS LEDtube VLE 600mm HO 8W 840 T8

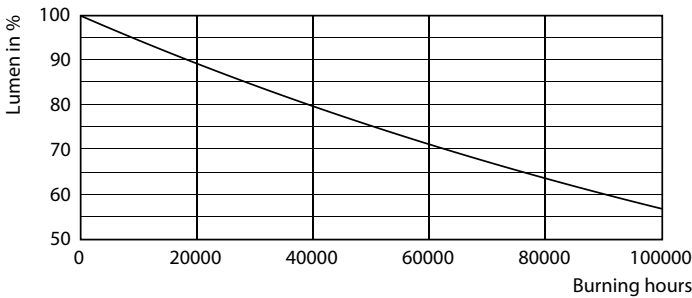

Lumen Maintenance Diagram - MAS LEDtube VLE 600mm HO 8W 840 T8

MASTER Value LEDtube T8

Lifetime

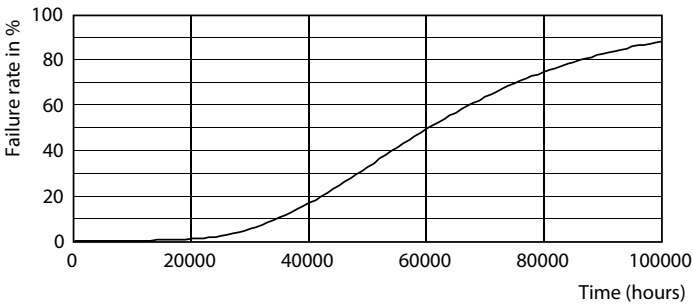

Life Expectancy Diagram - MAS LEDtube VLE 600mm HO 8W 840 T8

