BEGA

50 114

Ceiling and wall luminaire for indoor use

⟪10 ⌂ IP 44

Project · Reference number	Date

Product data sheet

Application
Ceiling and wall luminaire · indoor luminaire made of hand-blown opal glass, satin matt and metal housing, for all lighting tasks.
They are ideal for places where a soft and uniform lighting distribution is required.
Luminaire with a high protection class.

Product description
Metal housing, finish Colour white
Hand-blown opal glass, satin matt,
with sliding-bolt closure
2 mounting holes ø 5.5 mm
Distance apart 240 mm
2 cable entries for through-wiring for mains cable up to ø 10.5 mm max. 3 × 1.5$^{\square}$
Connection terminal 2.5$^{\square}$
Earth conductor connection
Lampholder E 27
Safety class I
Protection class IP 44
Protected against granular foreign bodies ≥ 1 mm and splash water
Impact strength IK03
Protection against mechanical impacts < 0.35 joule
⟪10 ⌂ – Safety mark
CE – Conformity mark
Weight: 2.7 kg

Lighting technology
Luminaire data for the DIALux lighting design program for outdoor lighting, street lighting and indoor lighting, as well as luminaire data in EULUMDAT and IES format are available on the BEGA website at www.bega.com.
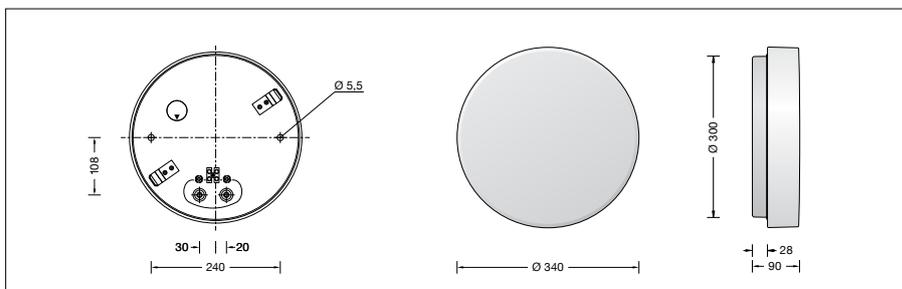
Lamp
Luminaire with screw base E 27
Lamp output max. 75 W
This product contains light sources of energy efficiency class E

Supplied lamp
BEGA LED lamp **13548**
LED Retrofit 7 W · 805 lm · 2700 K
dimmable

Supplied lamp
BEGA LED lamp **13586**
LED Retrofit 7 W · 805 lm · 3000 K
dimmable

Luminaire efficiency: 61.6%

Detailed technical and lighting data for the lamps can be found in the data sheets on our website.

Accessory · Trim rings
For this luminaire metal trim rings in 3 surfaces are optional available.
Trim rings are accessories and must be ordered separately.

Item	Part. No
Colour **White**	**13 079**
Stainless steel	**13 080**
Chrome	**13 081**